

### Features

- Recessed Adjustable Accent Downlight, integrated LED, die cast aluminium body, Ø155mm cut-out, CCT 4000K, SDCM<3, CRI90, 1950lm, total power consumption 20W, resulting in 98lm/W.




### Product Overview

Product name	START SPOT SCOOP 1950LM 940 MB WHITE
Technology	LED
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276980
Fixture luminous flux (lm)	1950
Luminaire efficacy (lm/W)	98
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	32
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK03

## START SPOT SCOOP 1950LM 940 MB WHITE 0060583

Product EAN number	5410288605838
Warranty	5 years
Colour Code	940
Useful luminous flux (#use)	1950

### Photometry

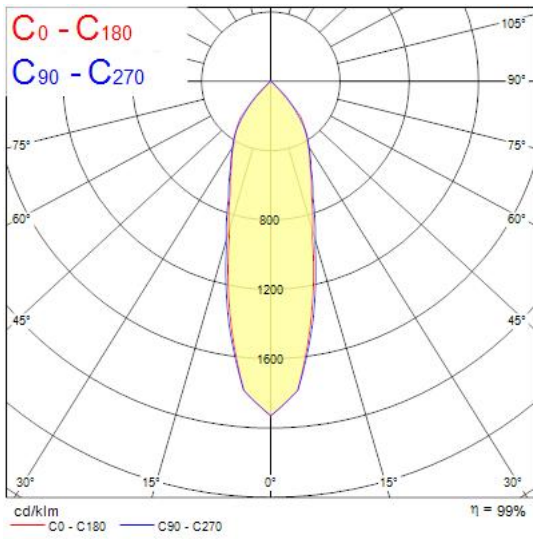

### Technical drawings

