

Features

• Integrated LED module 111mm, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 38°, optics: aluminium reflector and lens combination, colour temperature: 3000K warm white, total system power: 38W, total fixture output: 3500lm, 92lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable as standard, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, outer dimensions: Ø111x80mm. Suitable to be mounted only on dedicated Ludospot 111 housings accessories.


Product Overview

Product name	LUDOSPOT 111 3500LM 930 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
Environment	Indoor
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	38
Electrical protection	Class II
Control gear type	LED driver constant current


LUDOSPOT 111 3500LM 930 MB
0005333

LED Flickering Rate	Ultra low (5% or less)
IP rating	IP20
IK rating	IK03
Product EAN number	5410288053332
Warranty	5 years
Colour Code	930

Photometry

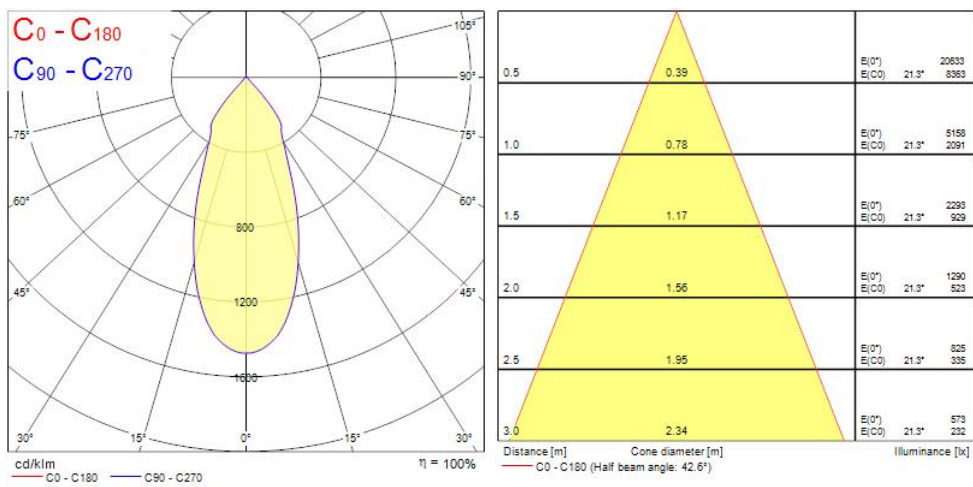

Technical drawings

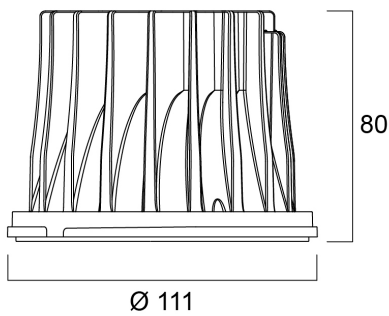



LUDOSPOT 111 3500LM 930 MB
0005333

Data table

GENERAL DATA

Product name	LUDOSPOT 111 3500LM 930 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
Environment	Indoor
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	92
Colour temperature (K)	3000
Colour Code	930
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	38
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	950
Inrush Current (A)	25



LUDOSPOT 111 3500LM 930 MB
0005333

Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	20

LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

PHYSICAL DATA

IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Nominal Product Diameter (mm)	111
Weight (kg)	0.6

PACKAGING

Single packaging type	Carton
Product EAN number	5410288053332
Packaging single width (cm)	13.5
Packaging single depth (cm)	8.7
DUN14 (outer)	15410288053339
Packaging outer length / height (cm)	46.0

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No