

Ludospot 111 Housings

LUDOSPOT 111 HOUSING ROUND 145MM TILT WHT
0005336



Product features

- Recessed housing to use with Ludospot Integrated LED module 111mm - LED module not included. Die-cast aluminium body, round bezel ring with white reflector, vertical tilt 25°, IP20 degree of protection, white color RAL9016, outer dimensions without LED module: Ø145x31mm, cut-out Ø140mm. Suitable for internal environment only.



PRODUCT OVERVIEW

Product name	LUDOSPOT 111 HOUSING ROUND 145MM TILT WHT
Technology	Accessory
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC002557
Warranty	5 years
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288053363

DATA TABLE

General data

Product name	LUDOSPOT 111 HOUSING ROUND 145MM TILT WHT
Technology	Accessory
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC002557
Warranty	5 years

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	145
Nominal Product Width (mm)	145
Cutout Dimensions (W x L in mm or Diameter in mm)	140
Weight (kg)	0.5

Packaging

Single packaging type	Carton
-----------------------	--------







Ludospot 111 Housings

LUDOSPOT 111 HOUSING ROUND 145MM TILT WHT

0005336


Product EAN number	5410288053363
Packaging single length / height (cm)	15.0
Packaging single width (cm)	15.0
Packaging single depth (cm)	4.5
DUN14 (outer)	15410288053360
Units per outer package	20
Packaging outer length / height (cm)	32.0
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	25.0

PHOTOMETRY

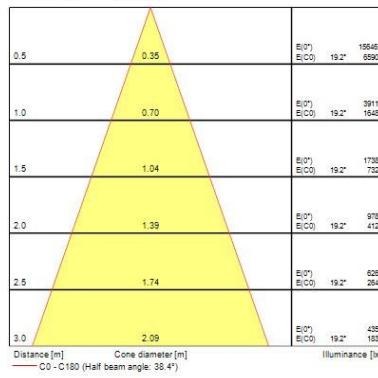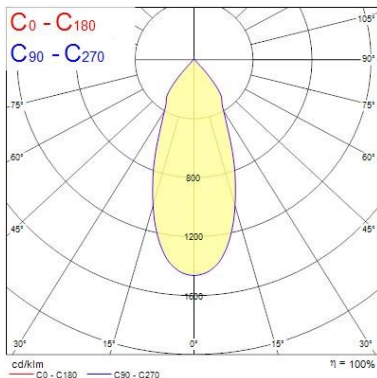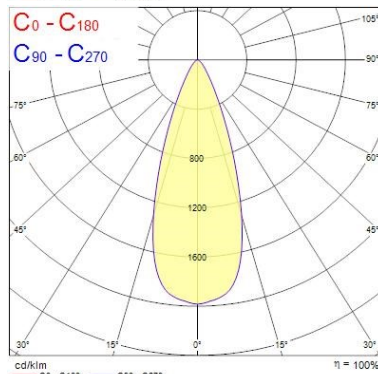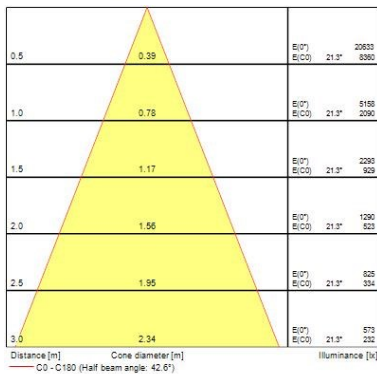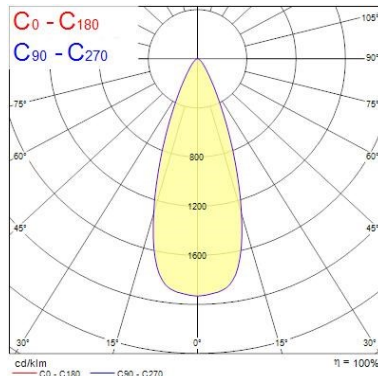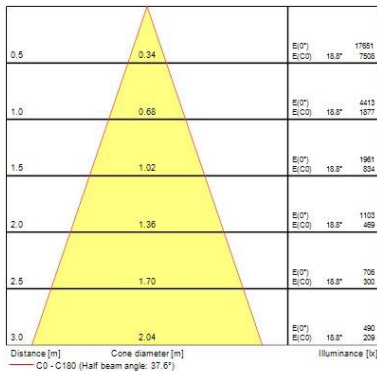

Ludospot 111 Housings

LUDOSPOT 111 HOUSING ROUND 145MM TILT WHT
0005336

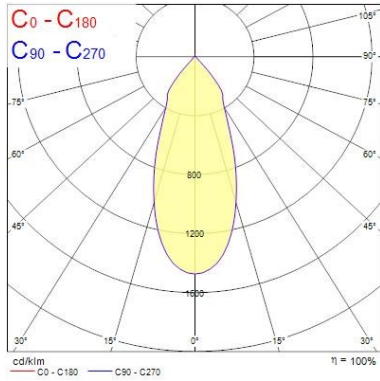

0.5	0.39	E(0°) E(C0)	21.5°	20732 6389
1.0	0.79	E(0°) E(C0)	21.5°	5195 2057
1.5	1.18	E(0°) E(C0)	21.5°	2309 932
2.0	1.58	E(0°) E(C0)	21.5°	1299 524
2.5	1.97	E(0°) E(C0)	21.5°	831 336
3.0	2.36	E(0°) E(C0)	21.5°	577 231

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 43.0°)

TECHNICAL DRAWINGS

