


Walraven VibraTek® MS-1X Spring Mount

(L20509)

high performance spring isolator for medium to heavy equipment

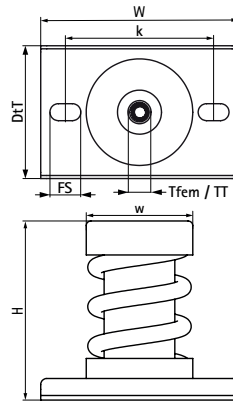

Features & benefits

- recommended for equipment with low working speeds, from 600 rpm and above
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- average ratio $K_x / K_z = K_y / K_z = 0.7$
- working temperature range $-90\text{ }^{\circ}\text{C}$ till $150\text{ }^{\circ}\text{C}$

Product Number	Female Thread	Thread Type	Total Width x Total Height x Total Depth	Width	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter	Tfem	TT	W x H x DtT	w	FS	k			25
Unit description			mm x mm x mm	mm	mm	mm	N	N	mm
2800401250	M12	Metric	128 x 116 x 86	69	20x11	96	250	1,150	25
2800401500	M12	Metric	128 x 116 x 86	69	20x11	96	300	1,380	25
2800402000	M12	Metric	128 x 116 x 86	69	20x11	96	400	1,840	25
2800403000	M12	Metric	128 x 116 x 86	69	20x11	96	600	2,760	25
2800404000	M12	Metric	128 x 116 x 86	69	20x11	96	800	3,680	25
2800405000	M12	Metric	128 x 116 x 86	69	20x11	96	1,000	4,600	25
2800406000	M12	Metric	128 x 116 x 86	69	20x11	96	1,200	5,520	25