


Walraven VibraTek® HS-1X Spring Hanger

(L20542)

high performance spring isolator for medium to heavy machinery

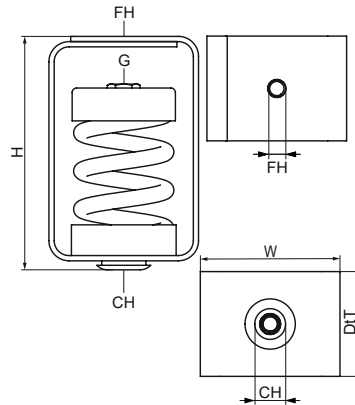

Features & benefits

- simple to install and does not need to be fixed to the base material
- recommended for machinery with low working speeds above 700 rpm
- epoxy powder-coated housing, cap and spring provide increased resistance to corrosion
- rubber spring base cup prevents contact between housing and the spring
- working temperature range -90 °C till 150 °C

Product Number	VVS Number	Connection Thread	Total Height	Total Width	Total Depth	Fixing Hole	Connection Hole	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference Letter		G	H	W	DtT	FH	CH			
Unit description			mm	mm	mm	mm	mm	N	N	mm
2800701000	18091110	M12	156	100	75	13	22	100	920	25
2800701250	18091112	M12	156	100	75	13	22	130	1,150	25
2800701500	18091115	M12	156	100	75	13	22	150	1,380	25
2800702000	18091120	M12	156	100	75	13	22	200	1,840	25
2800703000	18091130	M12	156	100	75	13	22	300	2,760	25
2800704000	18091140	M12	156	100	75	13	22	400	3,680	25
2800705000	18091150	M12	156	100	75	13	22	500	4,600	25
2800706000	18091160	M12	156	100	75	13	22	600	5,520	25