


Optix Recessed 4 cells  
*OPTIX RECESSED 4 CELLS 4000K ALU DALI*  
2021693

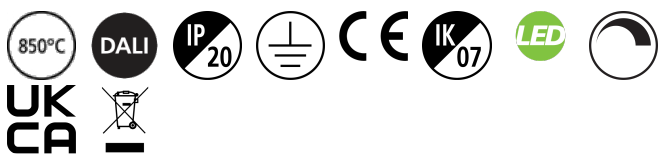

PRODUCT OVERVIEW

Product name	OPTIX RECESSED 4 CELLS 4000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	1010
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216932


PHOTOMETRY

## Optix Recessed 4 cells OPTIX RECESSED 4 CELLS 4000K ALU DALI 2021693

0.5	0.77 0.77	E07 E(C90) 27.5° E(C0) 37.5°	2892 842 847
1.0	1.54 1.53	E07 E(C90) 27.5° E(C0) 37.5°	841 402 182
1.5	2.31 2.30	E07 E(C90) 27.5° E(C0) 37.5°	388 71 72
2.0	3.08 3.07	E07 E(C90) 27.5° E(C0) 37.5°	180 42 43
2.5	3.85 3.84	E07 E(C90) 27.5° E(C0) 37.5°	112 26 28
3.0	4.62 4.60	E07 E(C90) 27.5° E(C0) 37.5°	71 18 18

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 75.5°)  
— C90 - C270 (Half beam angle: 75.2°)



## TECHNICAL DRAWINGS

