

## Data Sheet | Item Number: 294-8035


Lighting connector; push-button, external; for Linect®; without ground contact; DA+ DA- L PE N; 5-pole; Cod. I; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm<sup>2</sup>; Surrounding air temperature: max 85°C (T85); white



<https://www.wago.com/294-8035>



Color: ■ white

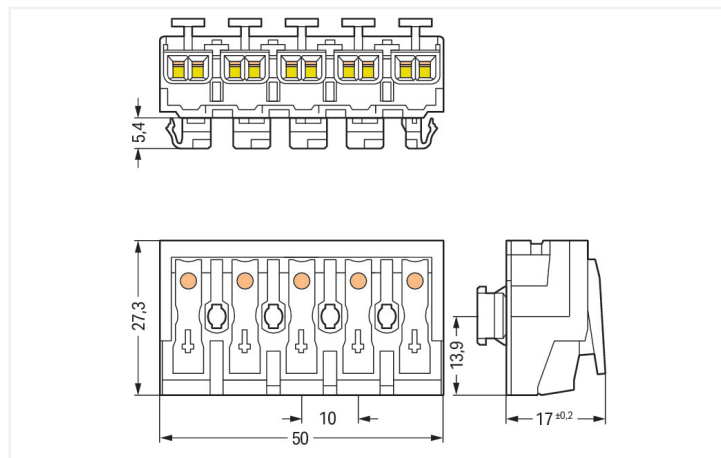

Dimensions in mm

Field-wiring terminal block with linect<sup>®</sup>, 294 Series, Push-in CAGE CLAMP<sup>®</sup>

Our field-wiring terminal block with linect<sup>®</sup> (item number 294-8035) simplifies electrical installations. Strip lengths must be between 8 and 9 mm when connecting conductors to field-wiring terminal block with linect<sup>®</sup>. This product features four conductor terminals and utilizes Push-in CAGE CLAMP<sup>®</sup> as well as PUSH WIRE<sup>®</sup>. Push-in CAGE CLAMP<sup>®</sup> connection technology is ideal for connecting all conductor types. It allows direct insertion of both solid and fine-stranded conductors with ferrules without the need for tools—all thanks to its pluggable design. Our PUSH WIRE<sup>®</sup> connection offers a quick and easy solution for connecting solid conductors. The dimensions are (50 x 22.4 x 27.3) mm (width x height x depth). Field-wiring terminal block with linect<sup>®</sup> is suitable for conductor cross sections ranging from 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> on one side and for conductor cross sections ranging from 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> on the other side as well as conductor cross sections from 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> and from 0.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup> depending on the conductor type.

Tin is used for coating the contact surfaces.

### Electrical data

Ratings	Connection points		
	IEC/EN 60998-1	IEC/EN 60998-1	IEC/EN 60998-1
Ratings per			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Connection points		
	IEC/EN 60998-2-2	IEC/EN 60998-2-2	IEC/EN 60998-2-2
Ratings per			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Linect <sup>®</sup> plug-in connection		
	IEC/EN 61984	IEC/EN 61984	IEC/EN 61984
Ratings per			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	16 A

## Connection Data

Total number of potentials	5
Number of connection types	4

### Connection 1

Connection type	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Solid conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm <sup>2</sup> / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	5

### Connection 2

Connection type	Internal 2
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

### Connection 3

Connection type	Internal 3
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 0.75 mm <sup>2</sup> / 18 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1 mm <sup>2</sup> / 18 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

### Connection 4

Connection type	Internal 4
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 0.75 mm <sup>2</sup> / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

## Physical data

Pin spacing	10 mm / 0.394 inches
Width	50 mm / 1.969 inches
Height	22.4 mm / 0.882 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches

### Mechanical data

Technology	Linect
Marking	DA+ DA- L ⊕ N

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Material group	Illa
Insulation material (main housing)	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.332 MJ
Weight	16.2 g

### Environmental requirements

Temperature stability	120 °C
T marking	T85

### Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	250 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821098799
Customs tariff number	85369010000

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 9.0	EC001284
ETIM 10.0	EC001284
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance



REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	fa530054-58a2-4a27-b1ee-886fc5b89818
SCIP notification number (Belgium)	290f1559-5c63-46b8-ad4c-457ed5522386
SCIP notification number (Bulgaria)	a63bcfdf-2f8d-4f18-b603-81ab788fdf1a
SCIP notification number (Czech Republic)	ba7e7474-ef6e-4f2e-9332-d34d4ddcbe48
SCIP notification number (Denmark)	4e71e99d-ac9f-4c5a-9dff-f80d643190b0
SCIP notification number (Finland)	7efe3274-81f6-4ecb-bd66-262a4d68cb85
SCIP notification number (France)	bf57eb1f-88ae-4423-ab83-91a9d45ad5e3
SCIP notification number (Germany)	18ccc518-5209-43fc-89ab-287c950420d6
SCIP notification number (Hungary)	09d24689-f8b2-4872-bd8c-cbce39232780
SCIP notification number (Italy)	e8937ac2-5263-4c79-9ed5-b083610158ce
SCIP notification number (Netherlands)	c7ea4540-c68b-43f5-92ad-04fad0bb5476
SCIP notification number (Poland)	8b1b31c1-e1ee-42cf-85f9-f2aca1a2148c
SCIP notification number (Romania)	d99b36bd-5827-4756-b179-1f818e93f3f7

**Environmental Product Compliance**

SCIP notification number (Sweden)

9725020e-e07d-44f5-a146-8b9cdf8f25d5

**Approvals / Certificates**

General approvals			Declarations of conformity and manufacturer's declarations		
 					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61535	40029808	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search	
Environmental Product Compliance 294-8035	↓

**Documentation**

**Additional Information**

Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

**CAD/CAE-Data**

CAD data		CAE data	
2D/3D Models 294-8035	↓	WSCAD Universe 294-8035	↓
		ZUKEN Portal 294-8035	↓

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)