


## START Downlight Flat IP44 Dimmable 205mm Round Recessed

START Downlight Flat 205 IP44 1750LM 840 DIM  
0054123



### Product features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1750Lm; 103Lm/W; 4000K; IP44 rated from the front.

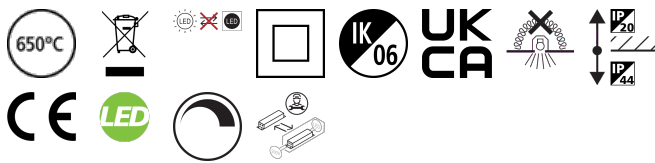


### PRODUCT OVERVIEW

Product name	START Downlight Flat 205 IP44 1750LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278499
Warranty	5 years
Useful luminous flux (Fuse)	1750
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	103
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541235

### PHOTOMETRY

## START Downlight Flat IP44 Dimmable 205mm Round Recessed

START Downlight Flat 205 IP44 1750LM 840 DIM  
0054123



Distance [m]	Cone diameter [m]	E0° [lx]	E15° [lx]	E30° [lx]
0.5	1.41	2524	547	244
	1.43		55.0°	239
1.0	2.82	631	54.7°	61
	2.86		55.0°	60
1.5	4.24	281	54.7°	23
	4.28		55.0°	22
2.0	5.65	188	54.7°	15
	5.71		55.0°	15
2.5	7.06	121	54.7°	10
	7.14		55.0°	10
3.0	8.47	73	54.7°	7
	8.57		55.0°	7

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 110.0°)  
— C90 - C270 (Half beam angle: 109.4°)

### TECHNICAL DRAWINGS

