



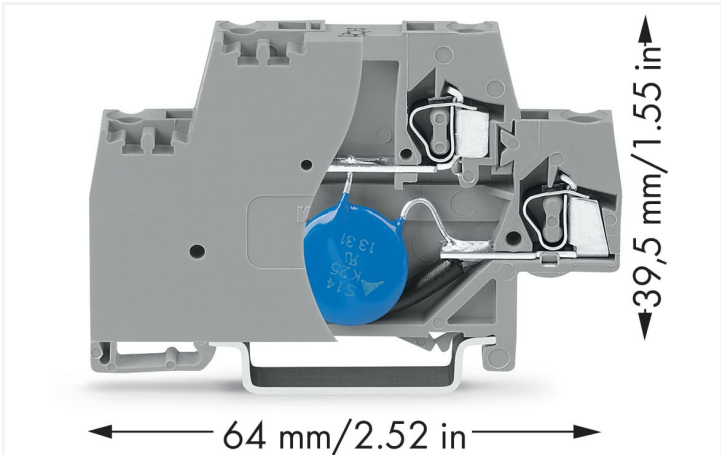


Color: ■ gray

Similar to illustration

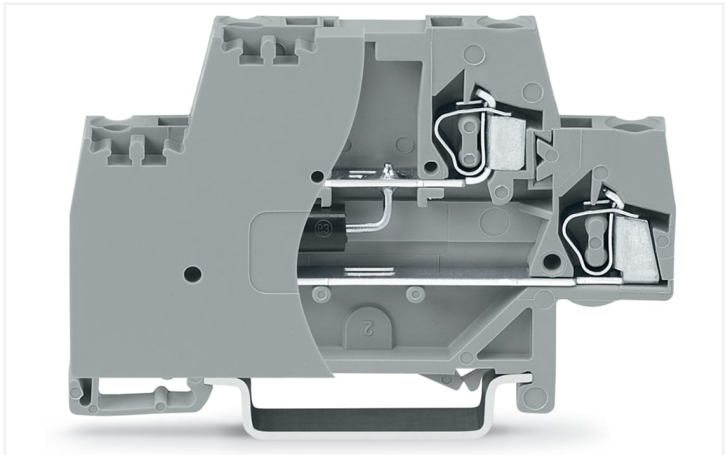

Similar to illustration

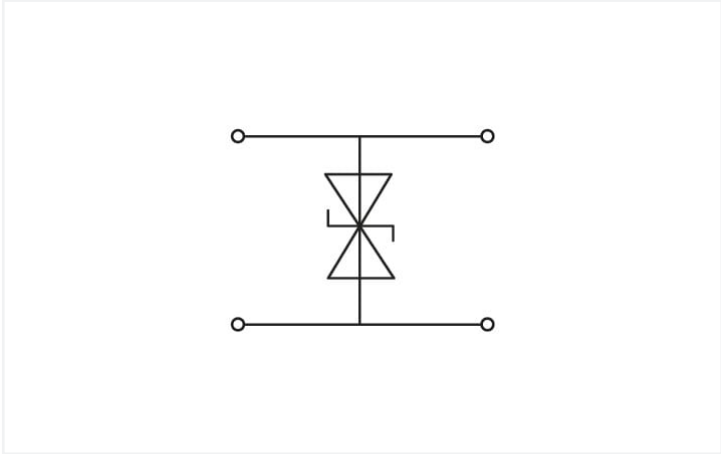

Short description:
This component terminal block with surge suppression device and end plate is equipped with a TVS diode.

Features:

- Protect your system against overvoltage
- Slim, space-saving design
- Control operational costs by preventing expensive, unplanned downtime
- High operational reliability and system uptime

Electrical data	
Nominal operating voltage	48 VDC
Maximum continuous voltage	53 VDC
Rated continuous current	20 A
Nominal discharge current (8/20 µs) (line)	90 A
Protection level (8/20 µs)	≤ 111 VDC
Capacitance	≤ 1.7 nF



Connection data	
Connections (number)	4
Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data	
Width	10 mm / 0.394 inches
Height	64 mm / 2.52 inches
Depth from upper-edge of DIN-rail	39.5 mm / 1.555 inches

Mechanical data	
Design	with end plate
Mounting type	DIN-35 rail

Material data	
Color	gray
Insulation material (main housing)	Polyamide (PA66)
Material group	I
Flammability class per UL94	V0
Fire load	0.362 MJ
Weight	14 g

Environmental requirements	
Processing temperature	-35 ... +85 °C

Commercial data	
Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-27
eCl@ss 9.0	27-14-11-27
ETIM 9.0	EC000903
ETIM 8.0	EC000903
PU (SPU)	50 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821515074
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I
SCIP notification number (Bulgaria)	a22956fa-aba6-430a-b4c2-02568c21d01c
SCIP notification number (Czech Republic)	29ab2b7f-e36d-4e10-9809-bff21c8e2602



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
280-944/281-590

↓

Documentation

Bid Text

280-944/281-590	19.02.2019	xml 3.18 KB	↓
280-944/281-590	11.02.2015	doc 25.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
280-944/281-590

↓

CAE data

EPLAN Data Portal
280-944/281-590

↓

WSCAD Universe
280-944/281-590

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Insulation stop

1.1.1.1 Insulation stop



Item No.: 280-470
Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white



Item No.: 280-471
Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray



Item No.: 280-472
Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; black

1.1.2 Jumper

1.1.2.1 Jumper



Item No.: 280-492
Jumper; 2-way; insulated; gray



1.1.3 Marking

1.1.3.1 Marker



Item No.: 2009-145
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 248-501
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.4 Tool

1.1.4.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured