

Simplex A11 Compression Adapter for Metal Pipes

ENG Installation Instructions.....02



A11 Compression Adapter

for Metal Pipes

ENG

+ Application


Heating systems

Max. pressure: 10 bar

Max. operating temperature: 110 °C

Dauertemperatur, 130 °C kurzzeitig

The compression adapter can be used for flush-mounted installations.

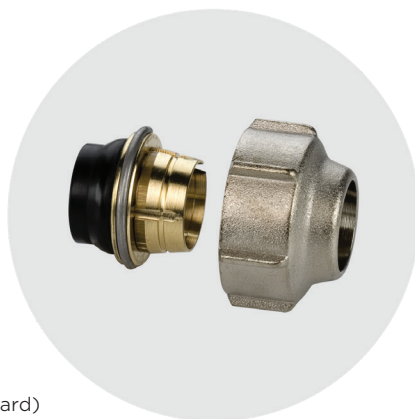

+ Appropriate Pipes

- Copper pipes (blank, nickled, chromed*) according to DIN EN 1057 (soft, semi-hard, hard)
- Carbon steel pipe (blank, galvanised) according to DIN EN 10305
- Stainless steel pipe according to DIN EN 10312


**Limitations for chrome-plated copper pipes: Dimension 14-18 mm for semi-hard and hard copper pipes*

+ Description


Elastic sealing 2-stage compression adapter with fixed stop for G 3/4», male thread with Euro taper according to DIN EN 16313. 1. Stage - seal; 2. Stage - clamp. The 2-stage function causes a precisely predetermined compression of the sealing element as well as a precisely defined tensioning of the clamp ring, which cannot be influenced by the assembly operative. Extended clamp ring for extremely high pulling forces. Support sleeves are not required. Sealing element with optimal properties with respect to heat stability and resistance to ageing.




Work on heating systems must only be done by qualified professional personnel and in accordance with the respective applicable regulations, guidelines and rules of engineering.

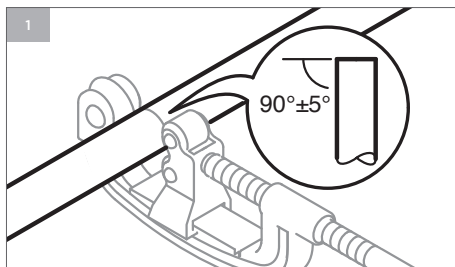


Cut the pipe at a right angle.

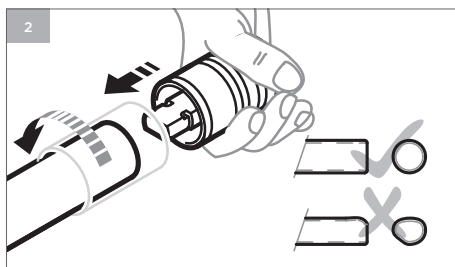

Deburr the pipe before assembling.

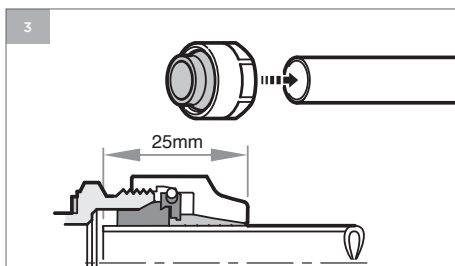

Note the insertion depth $a = 25 \text{ mm}$!
Connecting pipes must be vertical and/or horizontal to the adapter!
Align and fix pipes if necessary!

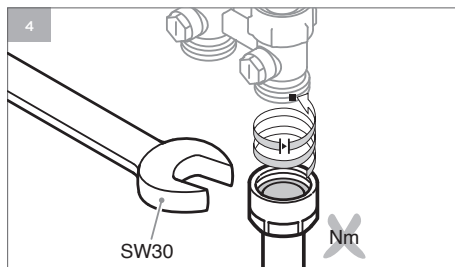

Two-stage assembly! Spanner wrench 30 mm. Tighten up to the end-stop after overcoming the first stage.

All technical data is non-binding and does not represent guaranteed properties of the goods.
The illustrations are symbolic and may differ from the respective product.
Installation instructions must be followed
Errors and technical changes reserved.

Aalberts hydronic flow control**Headquarters**

Postbus 30110 / 1303 AC Almere
Fort Blauwkapel 1 / 1358 AD Almere
Netherlands

+31 (0)36 526 2300 /
nl.info@aalberts-hfc.com

flamco.aalberts-hfc.com

Manufacturer

Aalberts hfc SX GmbH
Isnyer Str. 28 / 88260 Argenbühl
Germany

+49 7566 94080 /
de.info@aalberts-hfc.com

België / Belgique

+32 (0)2 371 01 61
be.info@aalberts-hfc.com

Северна Македонија

+389 2 30 77 407
balkan@aalberts-hfc.com

Ceska Republika

+420 284 00 10 81
cz.info@aalberts-hfc.com

Danmark

+45 44 94 02 07
dk.info@aalberts-hfc.com

Deutschland

+49 342 927 130
de.info@aalberts-hfc.com

Eesti

+372 568 838 38
ee.info@aalberts-hfc.com

España

+34 902 89 89 89
es.info@aalberts-hfc.com

France

+33 (0) 986 000 400
fr.info@aalberts-hfc.com

Magyarország

+36 23 880 981
hu.info@aalberts-hfc.com

Österreich

+43 664 8822 8566
at.info@aalberts-hfc.com

Polska

+48 65 529 49 89
pl.info@aalberts-hfc.com

Slovensko

+421 475 634 043
sk.info@aalberts-hfc.com

Suomi

+358 010 320 99 90
fi.info@aalberts-hfc.com

Svenska

+46 050 042 89 95
se.info@aalberts-hfc.com

Switzerland

+41 41 854 30 50
ch.info@aalberts-hfc.com

United Arab Emirates

+971 56 6821500
ae.info@aalberts-hfc.com

United Kingdom

+44 17 447 447 44
uk.info@aalberts-hfc.com

Україна

+38 044 353-92-97
ua.info@aalberts-hfc.com