

### Features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4000Lm; 36W; 111Lm/W; Drive current: 750mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation. Not compatible with surface mounting frames. SylSmart Standalone (SSC) enabled.

### Product Overview


Product name	START Panel UGR19 600x600 4000Lm 840 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
E-number FI	4278372
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	111
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

Light your world


## START Panel UGR19 600x600 4000Lm 840 SSC 0042507

Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288425078
Warranty	5 years

### Photometry

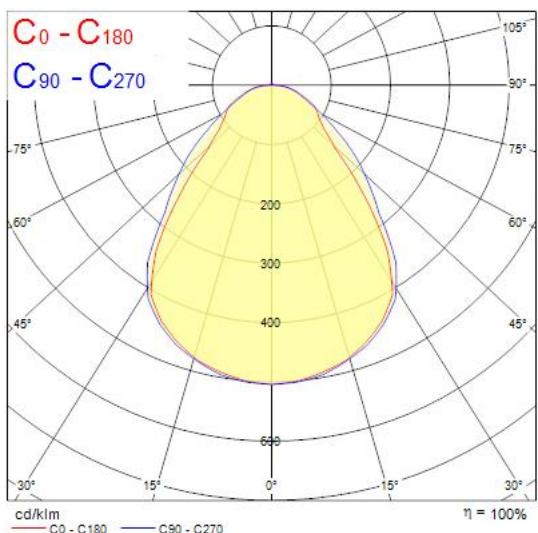

### Technical drawings

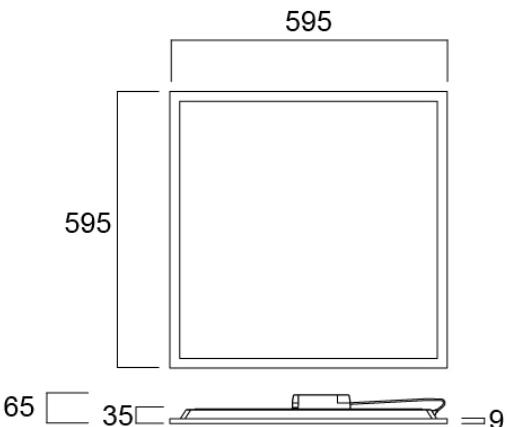

Light your world