

## Beacon XL Tune II


### BEACON XL TUNE II MB O/B LS3 BLACK

#### 2059987



#### Product features

- Integrated LED spotlight, Black RAL9005, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 32° (Medium Beam) optics, color temperature: 1800-6500K Tuneable white, total system power: 33W, total fixture output: 2027lm, luminaire efficacy: 61lm/W, LOR: 100%, colour rendering: Ra: 90 typical, LED Chromaticity: 3step MacAdam ellipse, lifetime: 35,000hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: Class I, 3-circuit track adaptor suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x1205mm, weight: 1.66kg.

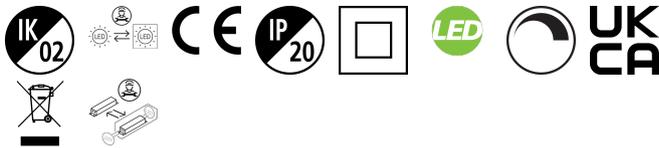


#### PRODUCT OVERVIEW

Product name	BEACON XL TUNE II MB O/B LS3 BLACK
Technology	LED
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries
ETIM Class	EC001744
Warranty	5 years
Useful luminous flux (Fuse)	2027
Fixture luminous flux (lm)	2027
Luminaire efficacy (lm/W)	61
LOR (%)	100
Light colour	Tuneable White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM2
Beam Angle (°)	32
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	1
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768599875

## Beacon XL Tune II

BEACON XL TUNE II MB O/B LS3 BLACK  
2059987

### PHOTOMETRY

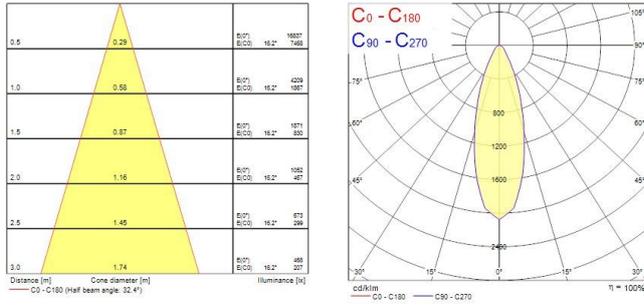

### TECHNICAL DRAWINGS

