

## PRODUCT DATASHEET


**Type:** eTRACE-HW-PRO  
**Art. Nr.:** 41248



9120105414043

### Short description

Self-regulating hot water heating belt, 13 W/m

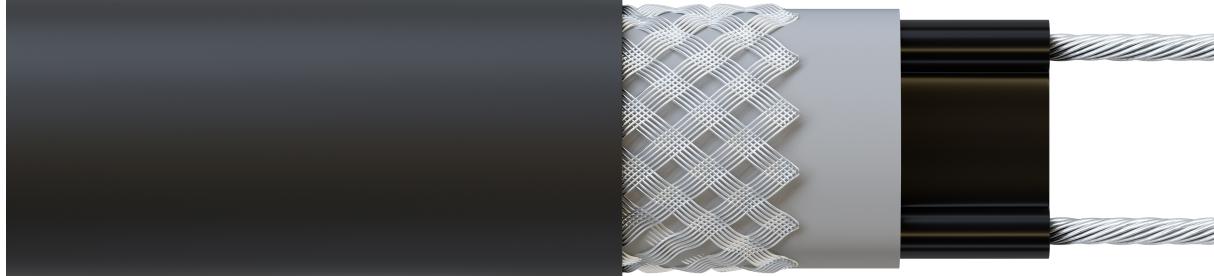

### Product Description

The eTRACE-HW-PRO self-regulating heating tape is used on tanks, pipes, valves and much more for process temperatures between 30 °C and approx. 80 °C. With the exception of the connections, the heating tape may be completely immersed in a liquid. The eTRACE-HW-PRO heating tape is often used to heat grease lines, e.g. in the food industry. However, it is also useful for waste water pipes in canteens and (large) kitchens to prevent the build-up of grease through heating. The heating tape is moisture-proof and UV-resistant, the supply conductors are nickel-plated copper. These self-regulating heating tapes can be easily cut to the required length and used immediately. Max. Ambient temperature: 85 °C switched off, nominal temperature: 65 °C switched on, min. installation temperature: -30°C, min. bending radius: 25 mm, max. heating circuit length at 0 °C/16 A: 75 m, 230V, CE compliant

### ETIM 10 Characteristics

<b>Cable type</b>	Dual core	<b>Nominal voltage</b>	230 Volt
<b>Constant power</b>	✗	<b>Max. hold temperature</b>	85 Degrees celsius
<b>Self-limiting</b>	✓	<b>Heating capacity</b>	11 Watt per metre
<b>Screening</b>	Braiding	<b>Diameter</b>	0 Millimetre
<b>Material screening</b>	CuNi	<b>Height</b>	6.1 Millimetre
<b>Surface coating screening</b>	None	<b>Width</b>	13.2 Millimetre
<b>Colour</b>	Black	<b>Length</b>	0 Metre
<b>Application</b>	Fluid temperature monitoring		

Created on: 16/12/2025