



## Features

- Ultra-efficient LED filament lamp range with the same reminiscent look of the classic traditional lamp
- Save up to 95% on energy bills compared to old incandescent lamps
- Energy Class A and best-in-class lumen efficacy
- Sustainable and eco-friendly solution
- Last three times longer than the standard LED retrofit lamps
- Remarkable 50,000 hours average rated life – reducing the hassle of frequent replacements
- Sparkling light effect
- Ideal for everyday lighting in homes, hotels, restaurants and more
- Omni-directional light distribution
- Non-dimmable


## Product Overview

Product name	ToLEDo Platinum RT GLS CL 1535LM 827 E27 SL
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741173
Correlated colour temperature (k)	2700
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	320
Photobiological Risk Group	RG1
Wattage (W)	7.3
Power consumption (W)	7.3
Dimmable	No

## ToLEDo Platinum RT GLS CL 1535LM 827 E27 SL 0030132

IP rating	IP20
Product EAN number	5410288301327
Warranty	5 years
Useful luminous flux (#use)	1535

### Technical drawings

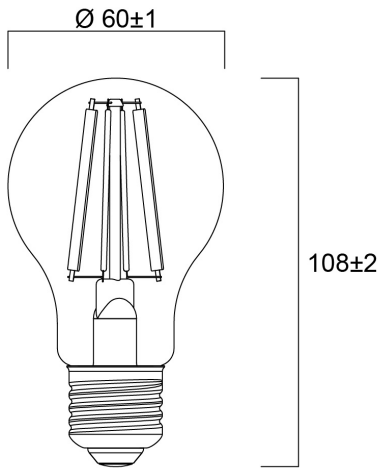

### Data table

#### GENERAL DATA

Product name	ToLEDo Platinum RT GLS CL 1535LM 827 E27 SL
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
E-number FI	4741173
Warranty	5 years

## OPTICAL DATA

Useful luminous flux (#use)	1535
Correlated colour temperature (k)	2700
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	320
Photobiological Risk Group	RG1

## ELECTRICAL DATA

Power consumption (W)	7.3
Wattage (W)	7.3
Equivalent watt (W)	100
Current (A)	0.07
Primary Supply/Product voltage - min (V)	240.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Dimmable	No
Inrush Current (A)	10.2
Inrush Duration (µs)	130
Lamp Energy Label (class)	A
Nominal Frequency (Hz)	50/60Hz

## LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

## PHYSICAL DATA

IP rating	IP20
Nominal Product Height (mm)	108
Nominal Product Diameter (mm)	60
Weight (kg)	0.055

## PACKAGING

Product EAN number	5410288301327
Packaging single length / height (cm)	7.5
Packaging single width (cm)	7.5
Packaging single depth (cm)	14.0
DUN14 (inner)	15410288301324
Units per outer package	6
Packaging outer length / height (cm)	23.9
Packaging outer width (cm)	16.1
Packaging outer depth (cm)	15.0

## SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo Platinum RT GLS CL 1535LM 827 E27 SL  
0030132

## Energy label



0030132



8  
kWh/1000h



2019/2015



0030132



8  
kWh/1000h



2019/2015