

Beacon LED Accent

BEACON ACCENT 97CRI 3K WIDE BEAM L3 ON-BOARD DIM BLACK
2059560



PRODUCT OVERVIEW

Product name	BEACON ACCENT 97CRI 3K WIDE BEAM L3 ON-BOARD DIM BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	1451
Luminaire efficacy (lm/W)	69
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768595600

DATA TABLE

General data

Product name	BEACON ACCENT 97CRI 3K WIDE BEAM L3 ON-BOARD DIM BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium

Beacon LED Accent

BEACON ACCENT 97CRI 3K WIDE BEAM L3 ON-BOARD DIM BLACK
2059560

Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1451
Luminaire efficacy (lm/W)	69
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	15
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

Packaging

Beacon LED Accent

BEACON ACCENT 97CRI 3K WIDE BEAM L3 ON-BOARD DIM BLACK
2059560


Single packaging type	Carton
Product EAN number	5025768595600
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768595600
Packaging outer length / height (cm)	16.0

PHOTOMETRY

0.5	0.49	E(0°) E(C0)	26.1°	9041 3289
1.0	0.98	E(0°) E(C0)	26.1°	2260 825
1.5	1.47	E(0°) E(C0)	26.1°	1005 367
2.0	1.96	E(0°) E(C0)	26.1°	555 208
2.5	2.45	E(0°) E(C0)	26.1°	352 132
3.0	2.94	E(0°) E(C0)	26.1°	251 92

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 52.2°)

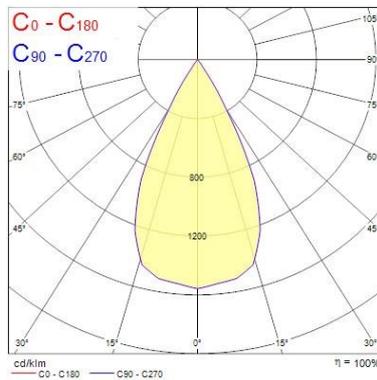

TECHNICAL DRAWINGS

