


Walraven RapidStrut® Stainless Steel channel

(M4505)

suspension and support

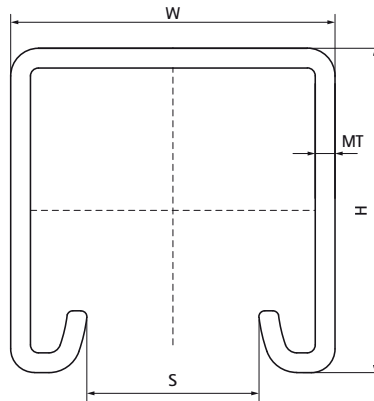

Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- type 41x41x2,5 tested for fire safety according EN1363-1
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	VVS Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
6507327	018050420	41x21x2,5	21	41	3,000	2.50	22
6507627	018050422	41x21x2,5	21	41	6,000	2.50	22
6507347	018050421	41x41x2,5	41	41	3,000	2.50	22
6507647	018050442	41x41x2,5	41	41	6,000	2.50	22