

36 517 979 Product version up to 5/15/2020











- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- Function from: 4.5 l/min
- with anti-scale system

**Technical data:**

- cover plate 240 x 60 mm
- 1/2" connection

**Notes:**

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

|   |                               |               |
|---|-------------------------------|---------------|
|    | Platinum                      | 36 517 979-08 |
|    | Chrome                        | 36 517 979-00 |
|    | Brushed Platinum              | 36 517 979-06 |
|    | Dark Chrome                   | 36 517 979-19 |
|    | Light Gold (PVD)              | 36 517 979-26 |
|    | Brushed Light Gold (PVD)      | 36 517 979-27 |
|    | Brushed Durabrass (23kt Gold) | 36 517 979-28 |
|    | Matte Black                   | 36 517 979-33 |
|    | Brushed Gold (PVD)            | 36 517 979-37 |
|    | Brushed Dark Brass (PVD)      | 36 517 979-39 |
|  | Brushed Bronze (PVD)          | 36 517 979-42 |
|  | Brushed Dark Bronze (PVD)     | 36 517 979-43 |
|  | Brushed Champagne (22kt Gold) | 36 517 979-46 |
|  | Champagne (22kt Gold)         | 36 517 979-47 |
|  | Brushed Chrome                | 36 517 979-93 |
|  | Brushed Dark Platinum         | 36 517 979-99 |

**Required miscellaneous**

**xGRID Installation track 555 mm -** 12 360 970 90



**Recommended miscellaneous**

**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90



**Required miscellaneous**

**xGRID Installation track 555 mm -** 12 360 970 90



**Required miscellaneous**

**Concealed wall installation box -** 35 206 970 90  
 • min. recess depth 100 mm  
 • max. recess depth 173 mm



**Required miscellaneous**

**Concealed wall installation box -** 35 206 970 90  
 • min. recess depth 100 mm  
 • max. recess depth 173 mm




**Recommended miscellaneous**

**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90




36 517 979 Product version up to 5/15/2020


mm [inches]

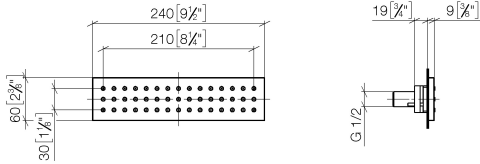

**Flow rate chart**

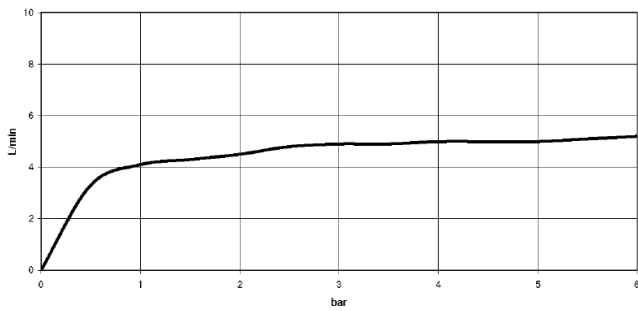

**Trajectory diagram**

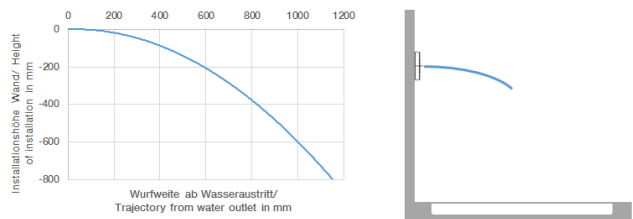

**Codes & Standards**

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

**Ü-Zeichen**



## WATER BAR Concealed body spray - Platinum

---

SERIES-VARIOUS


36 517 979 Product version up to 5/15/2020

### Certificates and sustainability

---

WRAS\_1304

LGA\_19

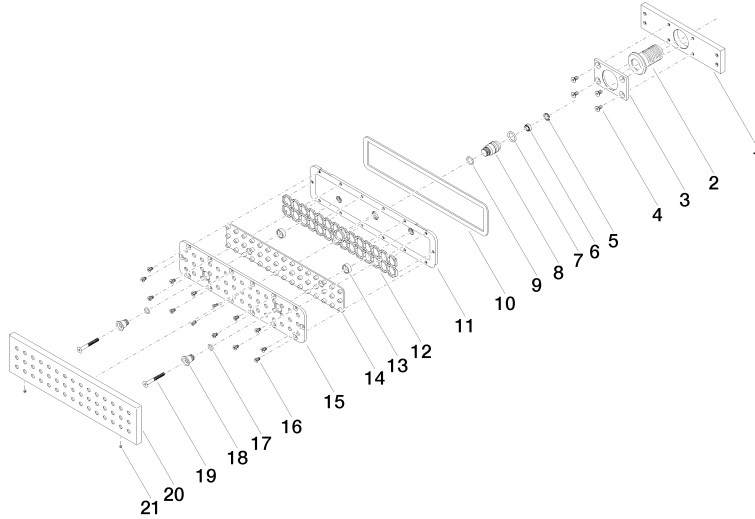

**Spare parts list**

| No.  | Item Number        | Name  | Quantity used | Delivery time |
|--|--------------------|---|---------------|---------------|
| 19   | 09 30 30 164 90    | Mounting Countersunk screw with hexagon socket M4 x 35 mm - | 2.00          | 14            |
| 11   | 09 11 02 135-08    | Connection - Platinum                                       | 1.00          | -             |
| Spare part can no longer be ordered, please order the replacement item |                    |   |               |               |
|  | 90110233200-00     | Insert 280 x 67 x 175 mm - Chrome                           |               |               |
| 18   | 09 24 04 249-08    | Nipple Ø 13 x 14 mm - Platinum                              | 2.00          | -             |
| Spare part can no longer be ordered, please order the replacement item |                    |   |               |               |
| 12   | 09 17 97 058 90    | Holder 213 x 33 x 4,5 mm -                                  | 1.00          | 14            |
| 5  | 09 16 01 016 90    | Ring Retaining ring Ø 10 x 1 mm -                           | 1.00          | 14            |
| 17   | 09 14 10 132 90    | O-Ring EPDM 70 6,0 x 1,5 mm -                               | 2.00          | 14            |
| 20   | 09 27 99 001-08    | Rosette 240 x 60 x 9 mm - Platinum                          | 1.00          | 54            |
| 2  | 09 24 04 247 20 90 | Connection Ø 31,5 x 42 mm -                                 | 1.00          | 14            |
| 14   | 09 12 01 076 90    | Insert Spray pad 219 x 39 x 6 mm -                          | 1.00          | 82            |
| 4  | 09 30 30 116 90    | Mounting Countersunk screw with hexagon socket M4 x 8 mm -  | 4.00          | 14            |
| 16   | 09 30 30 163 90    | Mounting Countersunk screw with cross-recess M3,5 x 6 mm -  | 14.00         | 14            |
| 3  | 09 11 02 138 90    | Holder 60 x 37 x 4 mm -                                     | 1.00          | 14            |
| 8  | 09 24 04 248 90    | Nipple Ø 15 x 25 mm -                                       | 1.00          | 14            |
| 7  | 09 14 10 003 90    | O-Ring EPDM 70 11,0 x 2,0 mm -                              | 1.00          | 14            |
| 15   | 09 11 02 136-00    | Rosette 240 x 60 x 9 mm - Chrome                            | 1.00          | -             |
| Spare part can no longer be ordered, please order the replacement item |                    |   |               |               |
|  | 90110233200-00     | Insert 280 x 67 x 175 mm - Chrome                           |               |               |
| 1  | 09 11 02 137 90    | Retaining plate 150 x 37 x 8 mm -                           | 1.00          | 14            |
| 6  | 90 23 01 032 00 90 | Flow limiter Set Ø 95 x 35 mm, 6 l/min. -                   | 1.00          | 14            |
| 10   | 09 14 03 133 90    | Washer for Water Bar 231,5 x 51,5 x 2 mm -                  | 1.00          | 14            |
| 9  | 09 14 10 042 90    | O-Ring EPDM 70 9,0 x 1,5 mm -                               | 1.00          | 14            |
| 21   | 09 31 11 006 90    | Mounting Threaded pin with hexagon socket M3 x 3 mm -       | 2.00          | 14            |
| 13   | 09 28 10 142 20 90 | Ring Ø 12,5 x 4,7 mm -                                      | 2.00          | 14            |