
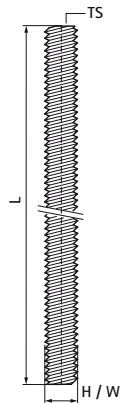


Walraven Threaded Rod

(K5510)

for threaded connections, hangers and ties,

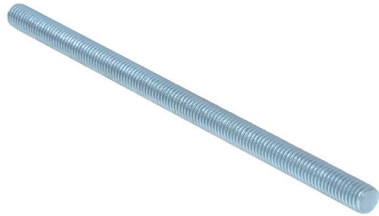

Features & benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- zinc plated
- thread with 60° angle provides best performance
- M10 and M12 tested for fire safety according to EN 1363-1
- M7B: pitch = M7 x 1 mm
- M7F: pitch = M7 x 1.5 mm



Product Number	VVS Number	Norm / Standard	Thread Size	Total Length	Total Height	Total Width
<i>Reference letter</i>			TS	L	H	W
<i>Unit description</i>				mm	mm	mm
6303006	018037100	DIN 976-1	M6	1,000	6	6
6303206	018037132	DIN 976-1	M6	2,000	6	6
6303306	018037164	DIN 976-1	M6	3,000	6	6
6303008	018037200	DIN 976-1	M8	1,000	8	8
6303208	018037232	DIN 976-1	M8	2,000	8	8
6303308	018037264	DIN 976-1	M8	3,000	8	8
6303010	018048920	DIN 976-1	M10	1,000	10	10
6303210	018037332	DIN 976-1	M10	2,000	10	10
6303310	018037364	DIN 976-1	M10	3,000	10	10
6303012	018037400	DIN 976-1	M12	1,000	12	12
6303212	018037432	DIN 976-1	M12	2,000	12	12
6303312	018037464	DIN 976-1	M12	3,000	12	12
6303016	018037500	DIN 976-1	M16	1,000	16	16
6303216	018037532	DIN 976-1	M16	2,000	16	16
6303316	018037564	DIN 976-1	M16	3,000	16	16
6303020	018037600	DIN 976-1	M20	1,000	20	20