

## RefLED Retro Superia ES50 DIMMABLE

RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL  
0029130



### Product features

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp
- Recreates backlight effect similar to halogen dichroic lamps
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- COOLFIT functionality - ensures overheat and over temperature protection
- High switching cycles: >100,000
- High colour rendering: CRI80
- Dimmable with approved dimmers
- Warranty: 5 Years



### PRODUCT OVERVIEW

Product name	RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL
Technology	LED
Watt (Rated) (W)	4.5
Type	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741024
Warranty	5 years
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.5
Dimmable	Yes
Average life (Nominal) (h)	25000
Product EAN number	5410288291307

### DATA TABLE

#### General data

Product name	RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL
Technology	LED
Watt (Rated) (W)	4.5
Type	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail

## RefLED Retro Superia ES50 DIMMABLE

*RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL*  
0029130

Operating temperature range (°C)	-20°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741024
Warranty	5 years

### Optical data

Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	750
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	4.5
Equivalent watt (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Inrush Current (A)	0.55
Inrush Duration (µs)	32
Lamp Energy Label (class)	F
Max. products per 16A C Breaker	762
Max. products per 16A B Breaker	762

### Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

### Physical data

Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.05

### Packaging

Single packaging type	Carton
Product EAN number	5410288291307
Packaging single length / height (cm)	8.2
Packaging single width (cm)	6.1

## RefLED Retro Superia ES50 DIMMABLE


*RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL*  
0029130

Packaging single depth (cm)	5.1
DUN14 (inner)	25410288291301
Units per inner package	6
Packaging inner length / height (cm)	9.2
Packaging inner width (cm)	16.4
Packaging inner depth (cm)	13.1
DUN14 (outer)	15410288291304
Units per outer package	60
Packaging outer length / height (cm)	20.8
Packaging outer width (cm)	17.8
Packaging outer depth (cm)	68.5


### Safety data

Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Dimmable with approved dimmers

## PHOTOMETRY

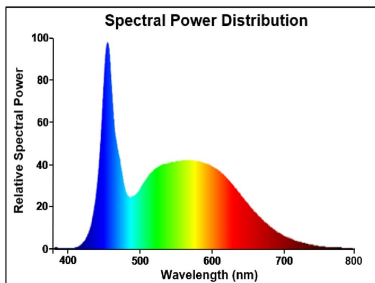

## TECHNICAL DRAWINGS




RefLED Retro Superia ES50 DIMMABLE  
*RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL*  
0029130



**SYLVANIA**

0029130

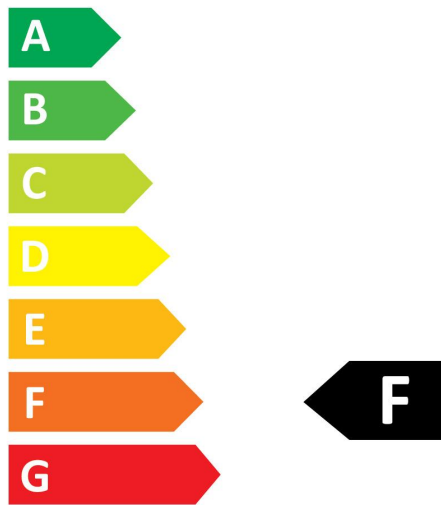

**5**  
kWh/1000h




2019/2015

## RefLED Retro Superia ES50 DIMMABLE

*RefLED Superia Retro ES50 V3 360LM DIM 865 36 SL*  
0029130



0029130

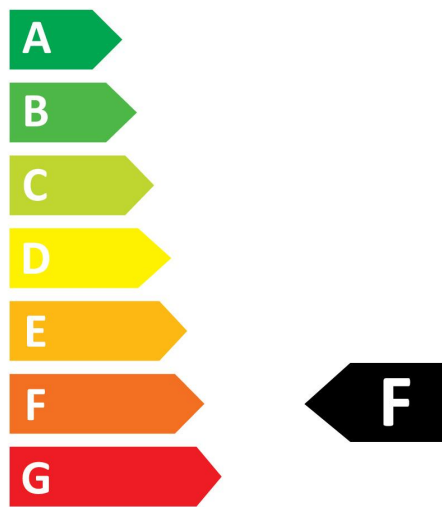

**5**  
kWh/1000h



2019/2015