

OTAO LINEAR WALL MOUNTING KIT 0041816



Features

- 2 pcs of wall mounting accessory, made of steel, compatible with Otao Linear luminaires, for mounting 1 luminaire.




Product Overview

Product name	OTAO LINEAR WALL MOUNTING KIT
Technology	LED (3 SDCM)
Housing	Steel
Mount	Wall surface mounted
General application	Office, Education
ETIM Class	EC002557
E-number FI	4170604
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Product EAN number	5410288418162
Warranty	5 years

OTAO LINEAR WALL MOUNTING KIT 0041816

Technical drawings

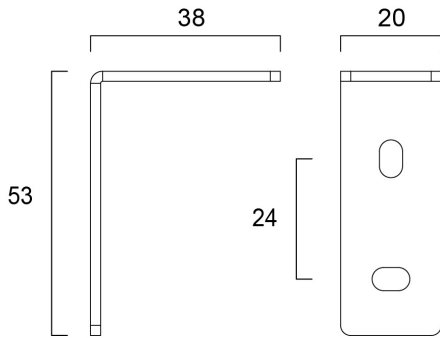

Data table

GENERAL DATA

Product name	OTAO LINEAR WALL MOUNTING KIT
Technology	LED (3 SDCM)
Type of accessory	Mounting kit
Housing	Steel
Mount	Wall surface mounted
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002557
E-number FI	4170604
Warranty	5 years

OPTICAL DATA

Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

OTAO LINEAR WALL MOUNTING KIT 0041816

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

Housing colour	RAL9003
----------------	---------

IP rating	IP20
-----------	------

IK rating	IK03
-----------	------

Weight (kg)	0.1
-------------	-----

PACKAGING

Product EAN number	5410288418162
--------------------	---------------

Packaging single length / height (cm)	16.5
---------------------------------------	------

Packaging single width (cm)	10.0
-----------------------------	------

Packaging single depth (cm)	1.0
-----------------------------	-----

DUN14 (inner)	15410288418169
---------------	----------------

Units per outer package	100
-------------------------	-----

Packaging outer length / height (cm)	47.0
--------------------------------------	------

Packaging outer width (cm)	42.0
----------------------------	------

Packaging outer depth (cm)	14.5
----------------------------	------

SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----

Optimal operating condition (°C)	5-50
----------------------------------	------

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----