TECHNICAL DATA SHEET

DucoFlex Manifold Box 3 x oval (F) 1 x oval (M)





The DucoFlex manifold box 3 x oval (F) > 1 x oval (M) is multifunctional and flexibly deployable. You can easily connect an oval duct to the oval connection (M), allowing the plenum to be mounted in a more accessible position. On the three oval connections (F), you can install adapters 3x63, 3x75 or 2x90.

Properties

Article number	0000-7049
Dimensions (W x H x L)	230 x 70 x 235 mm
Airtightness class	According to EN17192: ATC1
Inside wall finish	Smooth and flat inside wall
Maintenance	Easy to clean
Specific properties	• "Click & Go" system ensures quick and airtight joints • Operating temperature: -25°C to 40°C • Minimum installation temperature: -5 °C
Connections	• 3 x oval (F) • 1 x oval (M)
Range of application	Supply / Extraction
Maximum flow rate	300 m³/h
Material	ABS
Colour	Green
Packaging	• Packaged individually • Extra in the packaging: 1x cap oval



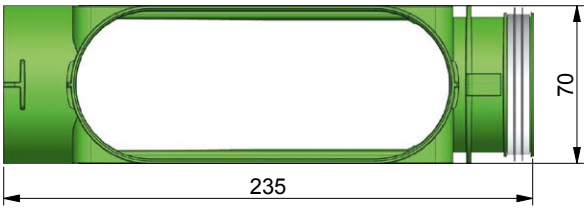

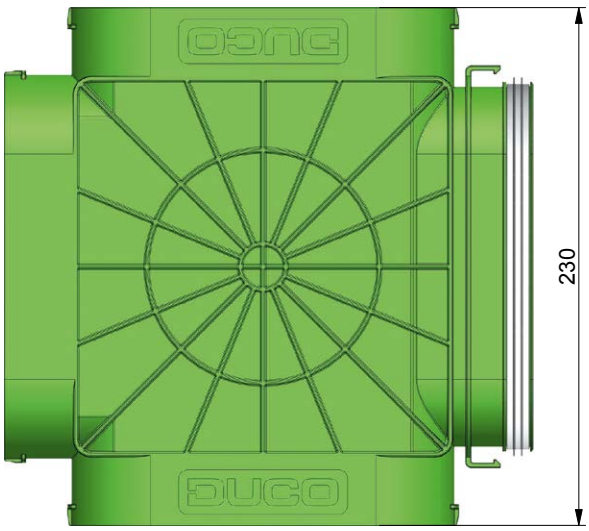

Pressure/flow characteristics

Flow rate m³/h	Pressure Pa (supply) 2 connections	Pressure Pa (supply) 3 connections	Pressure Pa (extraction) 2 connections	Pressure Pa (extraction) 3 connections
50	0.7	0.1	0.7	0.1
75	1.6	0.2	1.5	0.1
100	2.8	0.4	2.8	0.2
125	4.4	0.6	4.3	0.4
150	6.3	0.9	6.2	0.6

