

# IP65 empty box

Item No: 0030448




PRO



IP65 box to guarantee the protection of the driver against water ingress. Can be used with any fixtures where the driver fits into the box. Supplied with additional grommets and end caps and 3 way connector.

## Technical Assets

Dimensions (mm)

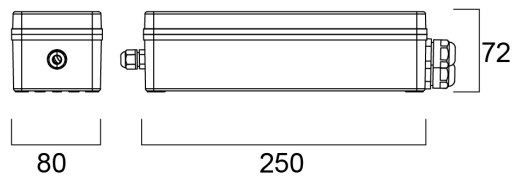

Photometrics

# IP65 empty box

Item No: 0030448



## General data

|                                  |                                           |
|----------------------------------|-------------------------------------------|
| Product name                     | IP65 empty box                            |
| Technology                       | Accessory                                 |
| Type of accessory                | Other                                     |
| General application              | Education, Hospitality,<br>Office, Retail |
| Operating temperature range (°C) | -20°C...+40°C                             |
| ETIM Class                       | EC002556                                  |
| E-number FI                      | 4278419                                   |
| Warranty                         | 2 years                                   |

## Physical data

|                             |       |
|-----------------------------|-------|
| Housing colour              | Grey  |
| IP rating                   | IP65  |
| IK rating                   | IK03  |
| Nominal Product Length (mm) | 250   |
| Nominal Product Width (mm)  | 80    |
| Nominal Product Height (mm) | 72    |
| Weight (kg)                 | 0.336 |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288304489  |
| Packaging single length / height (cm) | 32.0           |
| Packaging single width (cm)           | 9.0            |
| Packaging single depth (cm)           | 8.0            |
| DUN14 (inner)                         | 15410288304486 |
| Units per outer package               | 20             |
| Packaging outer length / height (cm)  | 47.0           |
| Packaging outer width (cm)            | 33.5           |
| Packaging outer depth (cm)            | 34.0           |

## Safety data

|                                  |        |
|----------------------------------|--------|
| Glow Wire Test (°C)              | 650    |
| Optimal operating condition (°C) | -20-40 |