


Data Sheet | Item Number: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored
<https://www.wago.com/210-196>



Color: ■ silver-colored

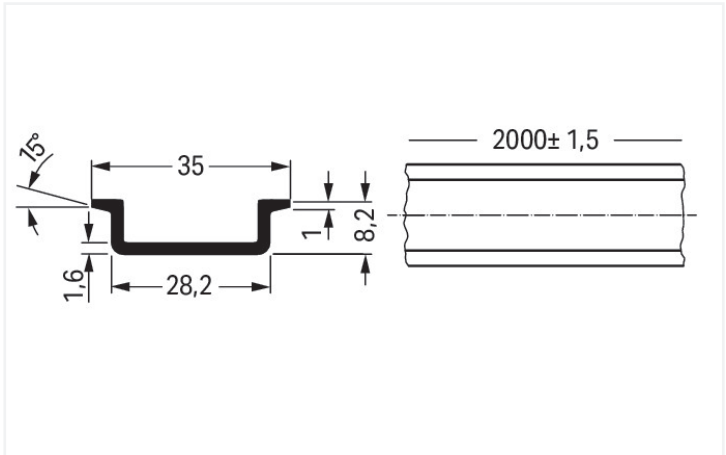

Dimensions in mm

Physical data		
Width		2000 mm / 78.74 inches
Height		8.2 mm / 0.323 inches
Depth		35 mm / 1.378 inches

Material data		
Color		silver-colored
Fire load		0 MJ
Weight		333 g

Commercial data		
Product Group		2 (Terminal Block Accessories)
eCl@ss 10.0		27-40-06-02
eCl@ss 9.0		27-40-06-02
ETIM 8.0		EC001285
ETIM 7.0		EC001285
PU (SPU)		20 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4017332272315
Customs tariff number		76042990900

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 210-196			

Documentation

Bid Text			
210-196	19.02.2019	xml 2.65 KB	
210-196	31.08.2017	doc 24.00 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 210-196	

CAE data	
EPLAN Data Portal 210-196	
WSCAD Universe 210-196	
ZUKEN Portal 210-196	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item No.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.2 Marking

1.1.2.1 Label



Item No.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white



Item No.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white



Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG/GU
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslopped	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslopped	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).