PRODUCTS FAMILY DECLARATION FOR VIDEO INDOOR STATION 4.3 SERIES FROM INDOOR STATION OF ABB

PEP ecopassport[®] Product Environmental Profile







Document in compliance with ISO 14025: 2006 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION	CONTACT INFORMATION			
ABB Xiamen Smart Technology Co., Ltd		James-Rui Zhang, james-rui.zhang@cn.abb.co	James-Rui Zhang, james-rui.zhang@cn.abb.com			
ADDRESS		WEBSITE	WEBSITE			
No.7,Fangshan South Road, Hi-tech area, Torch park, XiangAn District, Xiamen, China (assembly sites)		https://new.abb.com/cn				
STATUS		SECURITY LEVEL	REGISTRATION NUMBER	REV.	LANG.	PAGE
Approved		Public	PEP ecopassport® ABBG-00251-V01.01-EN 1 en 1/12			



ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harm-ful emissions, preserving natural resources and championing ethical and humane behavior.


More information on the topic about Sustainability strategy 2030 — ABB Group see the website: "https://global.abb/group/en/sustainability/sustainability-strategy-2030"



General Information

Reference product	One unit of Video Indoor Station 4.3 panel - produced by ABB, the representative product is M22483-W (2TMA220051W0003)
Description of the product	Video Indoor Station 4.3 (MSI26 & MSI 27), which is an important device of door entry system. It's with impressed industry design. Through video, audio and screen, it acts as the indoor station in door entry system.
Functional unit of the representative product	To receive and send sounds and videos between people outside the building and inside of the building so that to achieve the effective communication between the visitors (outdoor) and residents (indoor), according to the appropriate use scenario (Standby: 99.58%, On: 0.42%), and for the reference lifetime of 10 years.
Products concerned	The products covered by this PEP are: M22473-W (2TMA220051W0001), M22471-W (2TMA220051W0002), M22483-W (2TMA220051W0003), M22481-W (2TMA220051W0004), M22484-W (2TMA220051W0005)

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	2/12
© Copyright 2023 ABB. All rights reserved.					

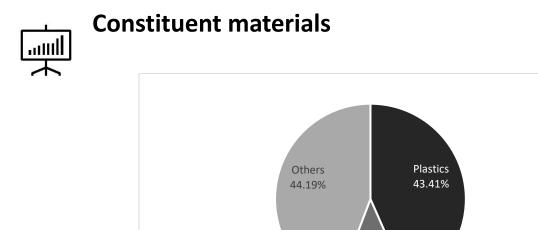

Total weight of Reference productNet weight of the product is 352.95 g, net weight of the product packaging is 126.98g, netweight of Reference productweight of the transport packaging is 210.25g. Gross weight of packaged product (include
product packaging and transport packaging) is 690.18 g.

Plastics Metals Others

Components	Mass (g)	Product weight, incl. product pack (g)
Product	352.95	
Product packaging	126.98	690.18
Transport packaging	210.25	

Plastics as % of weight		Metal	s as % of weight	Other as 9	Other as % of weight		
Name and CAS number	Weight-%	Name and CAS number	Weight-%	Name and CAS number	Weight-%		
PC plastic	12.1	Steel	12.4	Electronic component	18.8		
PP plastic	12.7			Paper	18.3		
PE plastic	11.0			Wood	6.7		
PMMA	5.1			Other	0.4		
Other plastic	2.5						

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	3/12
© Copyright 2023 ABB. All rights reserved.					

ရ Additional Environmental Information

Manufacturing	The components are transported by lorry from the suppliers to the manufacturing site and product is assembled and packed in ABB's plant before distribution. The electricity on the manufacturing site is electricity mix of China. Non-hazardous production waste is assumed to be transported by lorry (100 km by default in the PSR) and treated by dis- posal. Specific one-year data from 2023 on the manufacturing site level was collected and allocated to the product by mass allocation.
Distribution	100% to Germany.
Installation	The product is installed manually. For treatment of packaging waste, the scenario set by the PSR is followed.
Use	This product requires no servicing, no maintenance or additional products. The only energy used is low voltage electricity. The product was solely sold to Germany. Thus, the use stage has been modeled using the corresponding low voltage electricity mix of Germany.
End of life	The reference product is assumed to be partly recycled and recovered. And the remain- ing part is treated to the end-of-life stage.
Benefits and loads beyond the system boundaries	/


STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	4/12
© Copyright 2023 ABB. All rights reserved.					



Environmental impacts

Reference lifetime	10 years.
Product category	Video Indoor Station 4.3", PSR-0005-ed3.1-EN-2023 12 08, 3.15. Other Equipment, active products - continuous operation
Installation elements	Manually installation.
Use scenario	36.5h talk, 8723.5h standby each year, for 10 years reference service life.
Geographical representativeness	Raw materials and Manufacturing: Global. Assembly: China. Distribution: China to Germany. Use: Germany. EoL: Global
Technological representativeness	In the manufacturing stage, specific data was collected to calculate the environmental impact caused by the manufacturing process. To produce raw materials and parts, datasets from Ecoinvent 3.9.1 were used. During the dataset selection, the technological representation was considered carefully. Datasets with the same production processes were preferred. If not available, datasets with similar production processes were chosen.
Time representativeness	The generic data were extracted from databases (mainly Ecoinvent). Furthermore, the reference years of the datasets are between 2011 – 2022 and no data used in the model are older than 10 years. The primary data is from 2023.
Software and database used	SimaPro version 9.5.0.2. & databases Ecoinvent 3.9.1 & EF3.1
Energy model used	
Manufacturing	Materials and parts production: Global electricity mix Product assembly: Average electricity mix of China
Installation	/
Use	Average electricity mix of Germany
End of life	Average electricity mix of Global

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	5/12
© Copyright 2023 ABB. All rights reserved.					

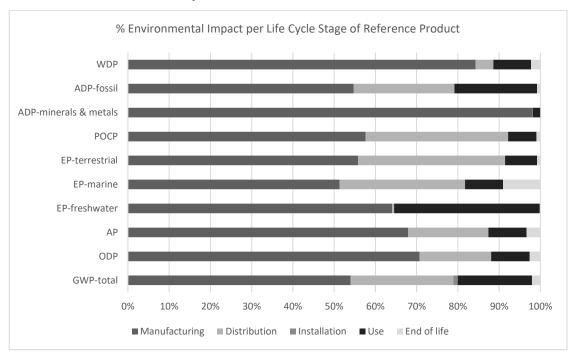

Common base of mandatory indicators

Environmental impact indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
GWP-total	kg CO ₂ eq	2.77E+01	1.49E+01	6.91E+00	2.85E-01	4.99E+00	5.65E-01
GWP-fossil	kg CO ₂ eq	2.77E+01 2.75E+01	1.49E+01 1.51E+01	6.91E+00	1.35E-02	4.99E+00 4.91E+00	5.65E-01
GWP-biogenic	kg CO ₂ eq	1.39E-01	-2.10E-01	6.03E-03	2.72E-01	7.16E-02	1.91E-04
GWP-luluc	• .	4.14E-02	3.26E-02	5.58E-04	1.68E-05	8.18E-03	1.09E-04
	kg CO ₂ eq		3.20E-02	5.58E-04	1.08E-05	8.185-03	1.09E-04
	al Warming Potenti lobal Warming Pote						
0	al Warming Potentia	0	l land use change				
ODP	kg CFC11 eq	6.09E-07	4.30E-07	1.06E-07	2.11E-10	5.69E-08	1.56E-08
ODP = Depletion p	otential of the strat	tospheric ozon	e layer				
АР	mol H+ eq	1.55E-01	1.05E-01	3.00E-02	7.18E-05	1.43E-02	5.18E-03
AP = Acidification	potential, Accumula	ated Exceedan	се				
EP-freshwater	kg P eq	2.01E-02	1.29E-02	1.03E-04	1.44E-06	7.11E-03	2.63E-05
EP-marine	kg N eq	4.01E-02	2.06E-02	1.22E-02	2.84E-05	3.70E-03	3.62E-03
EP-terrestrial	mol N eq	3.67E-01	2.04E-01	1.30E-01	2.76E-04	2.84E-02	2.87E-03
EP-freshwater = E	utrophication poten	itial, fraction o	f nutrients reaching	freshwater end c	ompartment		
EP-marine = Eutro	phication potential,	fraction of nu	trients reaching mai	ine end compartr	ment		
EP-terrestrial = Eu	trophication potent	ial, Accumulat	ed Exceedance				
РОСР	kg NMVOC eq	1.18E-01	6.79E-02	4.06E-02	9.66E-05	8.09E-03	1.11E-03
ADP-minerals & metals	kg Sb eq	2.93E-03	2.87E-03	1.88E-06	4.81E-08	5.46E-05	2.74E-07
ADP-fossil	μ	3.66E+02	2.00E+02	8.95E+01	1.61E-01	7.34E+01	2.87E+00
ADP-minerals & m	etals = Abiotic depl	etion potentia	l for non-fossil reso	urces			
ADP-fossil = Abiot	ic depletion for foss	sil resources p	otential				
WDP	m³ world eq. depr.	3.99E+00	3.36E+00	1.70E-01	1.39E-03	3.65E-01	8.99E-02
WDP = Water Dep	rivation potential						

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	6/12
© Copyright 2023 ABB. All rights reserved.					

Common base of mandatory indicators

Inventory flows indicator - Resource use indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
PERE	MJ	4.36E+01	2.18E+01	3.08E-01	3.91E-03	2.11E+01	3.10E-01
PERM	MJ	2.31E+00	2.31E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	4.59E+01	2.42E+01	3.08E-01	3.91E-03	2.11E+01	3.10E-01
PENRE	MJ	3.55E+02	1.89E+02	8.95E+01	1.61E-01	7.34E+01	2.87E+00
PENRM	MJ	1.12E+01	1.12E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	3.66E+02	2.00E+02	8.95E+01	1.61E-01	7.34E+01	2.87E+00

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials

 $\mathsf{PERM}=\mathsf{Use}$ of renewable primary energy resources used as raw materials

 $\mathsf{PERT} = \mathsf{Total} \; \mathsf{Use} \; \mathsf{of} \; \mathsf{renewable} \; \mathsf{primary} \; \mathsf{energy} \; \mathsf{resources}$

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total Use of non-renewable primary energy resources

Inventory flows indicator - Indicators describing the use of secondary materials, water, and energy resources

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	M ³	1.57E-01	1.12E-01	5.93E-03	4.87E-05	3.64E-02	2.86E-03

SM = Use of secondary material

 $\mathsf{RSF} = \mathsf{Use} \ \mathsf{of} \ \mathsf{renewable} \ \mathsf{secondary} \ \mathsf{fuels}$

 $\mathsf{NRSF} = \mathsf{Use} \mathsf{ of} \mathsf{ non-renewable} \mathsf{ secondary} \mathsf{ fuels}$

 $\mathsf{FW}=\mathsf{Use}$ of net fresh water

Inventory flows indicator - Waste category indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Hazardous waste disposed	kg	6.18E-02	4.74E-02	5.43E-03	1.30E-04	5.85E-03	2.98E-03
Non-hazardous waste disposed	kg	4.71E+00	2.41E+00	3.50E-01	1.44E-01	4.12E-01	1.39E+00
Radioactive waste disposed	kg	7.10E-04	3.55E-04	6.09E-06	5.70E-08	3.40E-04	9.92E-06

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	7/12
© Copyright 2023 ABB. All rights reserved.					

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	Kg	6.85E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.85E-02
Materials for energy recovery	Kg	6.88E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.88E-02
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Note: In manufacturing stage, the recycled content of raw materials is 0, and scrap value is considered according to PSR. In EoL stage, recovery rate and disposal rate is based on PCR.

Inventory flow indicator - other indicators

Indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of life
Biogenic carbon con- tent of the product	kg of C	0.00E+00	/	/	/	/	/
Biogenic carbon con- tent of the associated packaging	kg of C	7.34E-02	/	/	/	/	/

Note: As no biogenic carbon in the product, thus, only the biogenic carbon in the packaging was calculated. Of the product packaging and packaging for transportation, the materials containing biogenic carbon are wood pallet and paper board.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	8/12
© Copyright 2023 ABB. All rights reserved.					

Family of Products Extrapolation Rules

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by multiplying the values of the Reference product by the following coefficients:

The impact for Manufacturing, Distribution, Installation and End of life phases of a product covered by the PEP other than the representative product is proportional to weight of the product, weight of the product packaging and weight of the product, thus, the impacts of these phases should be separately calculated by multiple the coefficients factor_1, factor_2, factor_3, and factor_1 by the environmental impact for this phase of the representative product.

The environmental impact for Use phase of a product covered by the PEP other than the representative product is proportional to the amount of the electricity used in use stage, thus, the impacts should be calculated by multiple the coefficients factor_4 by the environmental impact for this phase of the representative product.

Product Model	Manufacturing	Distribution	Installation	Use	End of life
	Factor_1	Factor_2	Factor_3	Factor_4	Factor_1
M22483-W	1.00	1.00	1.00	1.00	1.00
M22481-W	0.93	0.95	1.00	1.00	0.93
M22484-W	0.96	1.03	1.24	1.00	0.96
M22473-W	1.68	1.73	1.85	0.97	1.68
M22471-W	1.68	1.72	1.85	0.97	1.68

Extrapolation rules for Manufacturing, Distribution, Installation, Use and End of life phases

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE		
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	9/12		
© Copyright 2023 ABB. All rights reserved.							

Environmental Impact Indicator Glossary

Impact indicators

Indicator	Description	Distribution
Global warming potentia (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	l kg CO₂ eq.
Ozone depletion (ODP)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC-11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H+ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic re- sources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic re- sources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation po- tential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m³ world eq. depr.

Resource use indicators

Indicator	Description	Distribution
Total use of primary en- ergy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	10/12
© Copyright 2023 ABB. All rights reserved.					

References

- PEP Ecopassport PROGRAM PCR-Product Category Rules for Electrical, Electronic and HVAC-R Products (PCR-ed4-EN-2021 09 06).
- PEP Ecopassport PROGRAM PSR-SPECIFIC RULES FOR Electrical switchgear and control gear Solutions (PSR-0005-ed3.1-EN-2023 12 08).
- ISO (2006a). ISO 14025:2006, Environmental labels and declarations Type III environmental declarations Principles and procedures.
- ISO (2006b). ISO 14040:2006/Amd 1:2020, Environmental management Life cycle assessment Principles and framework— Amendment 1.
- ISO 14044:2006/Amd 1:2017/Amd 2:2020 Environmental management Life cycle assessment Requirements and guidelines.
- ISO 14020:2000, Environmental labels and declarations General principles.
- ISO 14025:2006 "Environmental labels and declarations. Type III environmental declarations.
- EN 50693:2019, Product category rules for life cycle assessments of electronic and electrical products and systems.
- EN 15804 +A2:2019, Sustainability of construction works Environmental product declarations Core rules for the product category of construction products.
- LCA report –Video Indoor Station 4.3, OneTouch, Nile 7" and Basic 7" of Indoor station, 20-08-2024.

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	11/12
© Copyright 2023 ABB. All rights reserved.					

Registration number:	Drafting Rules: PCR-ed4-EN-2021 09 06						
ABBG-00251-V01.01-EN	Supplemented by: PSR-0005-ed3.1-EN-2023 12 08						
Verifier accreditation number:	Information and reference documents:						
VH51	www.pep-ecopassport.org						
Date of issue: 09-2024	Validity period: 5 years						
Independent verification of the declaration and data, in compliance with ISO 14025: 2006							
Internal: 🗆	External: 🛛						
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)							
PEP are compliant with XP C08-100-1: 2016 and EN 50693:2019 The components of the present PEP may not be compared with components from any other program.							
Document in compliance with ISO 14025: 2006, Environmental labels and declarations. Type III environmental declarations							

STATUS	SECURITY LEVEL	DOCUMENT ID.	REV.	LANG.	PAGE			
Approved	Public	PEP ecopassport [®] ABBG-00251-V01.01-EN	1	en	12/12			
© Copyright 2023 ABB. All rights reserved.								