


## Walraven Wall Plate CO<sub>2</sub> Welded (BUP1000)

(K1509)

fixing to wall or ceiling

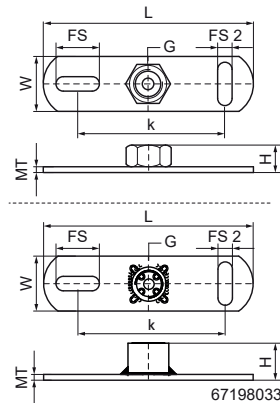

### Features & benefits

- fixings to wall, ceiling or floor (tension and bending loads allowed)
- slots at 90° to each other to simplify fixing
- with CO<sub>2</sub> welded connection nut
- material: steel
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number   | VVS Number | Connection Thread | Total Length | Total Width | Total Height | Material Thickness | Fixing Slot | Fixing Slot 2 | Heart To Heart Distance | Maximum Allowed Load Faz |
|------------------|------------|-------------------|--------------|-------------|--------------|--------------------|-------------|---------------|-------------------------|--------------------------|
| Reference Letter |            | G                 | L            | W           | H            | MT                 | FS          | FS 2          | k                       | Fa,z                     |
| Unit description |            |                   | mm           | mm          | mm           | mm                 | mm          | mm            | mm                      | N                        |
| 67198016         | 18045536   | M16               | 145          | 38          | 20           | 4.00               | 30x11       | 25x11         | 100                     | 6,000                    |
| 67198021         | 18045524   | G½"               | 145          | 38          | 22           | 4.00               | 30x11       | 25x11         | 100                     | 4,000                    |
| 67198033         | 18045528   | G1"               | 145          | 38          | 27           | 4.00               | 30x11       | 25x11         | 100                     | 5,500                    |