




Een volledig, veelzijdig systeem van modulaire containers, perfect geïntegreerd in de SYSTEM huishoudelijke serie en voldoet aan de installatiebehoeften met hoge bescherming van huishoudelijke, commerciële en industriële sectoren. De 27 COMBI serie is beschikbaar in de versie IP40 en in waterdichte versies met beschermingsgraad IP55, IP65 en IP66, aanbevolen voor alle buitentoepassingen onderhevig aan extreme atmosferische omstandigheden.

Omschrijving	4 modules	Kleur	Grijs RAL 7035
Aant. uitbreekopeningen Ø23	8 op de zijkanten / 1 op de bodem	Soort uitbreekopeningen	Verwijderbaar met gereedschap
IP waarde	IP40	Isolatie klasse	II
Mechanische weerstand	IK07	Configuratie	Module 2 x 2
Compartment voorbereiding	1	Kenmerken	Halogeenvrij
Dekselschroeven	Corrosiebestendig staal	Koppel schroeven aandraaien	0.8 NM
Buitenste afm. LxHxD (mm)	82 x 132 x 55	Gloeidraadtest	650 °C
Thermodruk met kogel	70 °C	Standaard	EN 60670-1
Installatie temperatuur	-25 +60 °C	Electrocod	0212

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant

DIMENSIONAL

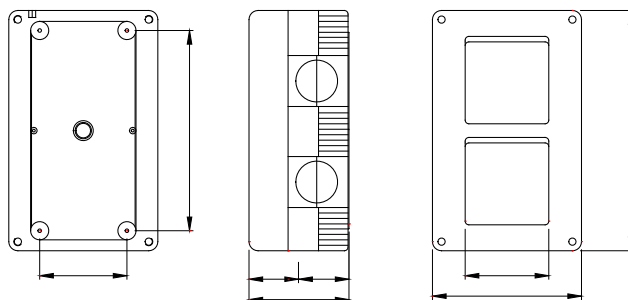

TECHNICAL SYMBOLOGY



IP

IP40



II

IK

IK07



Halogeenvrij

GWT

650 °C



70 °C

STANDARDS/APPROVALS

