
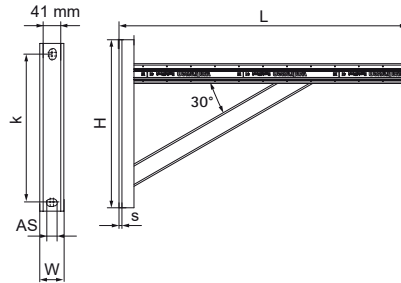


Walraven RapidStrut® Cantilever Arm with Rail Prop

(H0815)

cantilever arm with welded support



Features & benefits

- U-shaped baseplate with welded channel and welded support beam
- strong cantilever arm for applications with higher loads or extra safety required
- CO₂ welded
- inward formed flanges with serrated profile for extra grip
- horizontal profile type RapidStrut 41|M with continous perforation
- material: steel 1.0332
- hot dip galvanized

Product Number	NRF Number	Type	Total Height	Total Width	Total Length	Material Thickness	Anchoring Slot	Heart To Heart Distance
Reference Letter			H	W	L	MT	AS	k
Unit description			mm	mm	mm	mm	mm	mm
6601894	3489258	41 M	350	50	600	4.00	20x13	307.5