

### Features

- Integrated LED recessed spotlight, white bezel colour, white reflector, 50° degree beam angle, 3-CCT changeable 2700-3000-4000K, polycarbonate and aluminium body, low profile 68.5mm recessed depth, IP65 from the front, IK07, loop-in/loop-out terminals for fast wiring, 85mm bezel diameter, 68mm cutout, clear lens.

### Product Overview

Product name	START SPOT ALU 870LM 3CCT DIM IP65 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	870
Luminaire efficacy (lm/W)	100
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	8.7
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20

## START SPOT ALU 870LM 3CCT DIM IP65 WHT 0005187

IK rating

IK07

Product EAN number

5410288051871


Warranty

5 years

Dimming method

Mains: leading / trailing edge

### Photometry

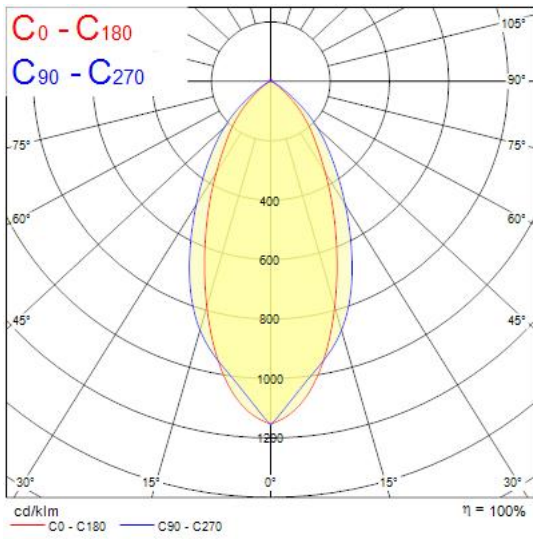

### Technical drawings

