


Walraven RapidStrut® Cantilever Arm 21|H Vertical (BUP1000)

(H0807)

special profile for shaft installation

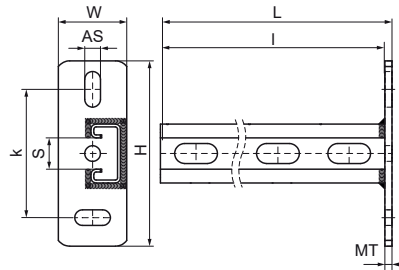

Features & benefits

- vertical welded cantilever arm for vertical pipe installations
- perfect solution for shaft situations with or without wall
- optimal utilization of the available space in shafts
- CO₂ welded
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0226
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Product Number	VVS Number	Type	Length	Total Height	Total Width	Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference Letter			<i>l</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description			mm	mm	mm	mm	mm	mm	mm	mm
6603828	18041213	41x21x2.5	300	130	48	305	5.00	25x11	22	90
6603829	18041216	41x21x2.5	600	130	48	605	5.00	25x11	22	90