

## Obico 68


OBICO 68 IP65 530lm 3CCT DIM ADJ BLACK

0005364



### Product features

- Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°) black bezel colour, 3 CCT options of 2700-3000-4000k, lumen up to 550lm, 5.4W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 37mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Air-proof, to limit air leakage when used in residential applications within the building's thermal envelope. Directly coverable with insulation material according to EN60598-1

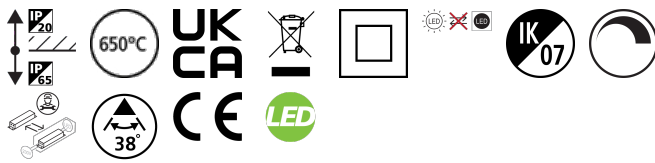

### PRODUCT OVERVIEW

Product name	OBICO 68 IP65 530lm 3CCT DIM ADJ BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278506
Warranty	5 years
Fixture luminous flux (lm)	530
Luminaire efficacy (lm/W)	98
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	5.4
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Housing colour	RAL 9017 - Traffic black
IP rating	IP65/20
IK rating	IK07
Product EAN number	5410288053646

### DATA TABLE

#### General data

Product name	OBICO 68 IP65 530lm 3CCT DIM ADJ BLACK
Technology	LED
Cap/Base	N/A

## Obico 68

OBICO 68 IP65 530lm 3CCT DIM ADJ BLACK

0005364

Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278506
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	530
Luminaire efficacy (lm/W)	98
Correlated colour temperature range (K)	2700 - 4000
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Distribution type	Symmetric
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	5.4
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.8
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	42
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	130
Inrush Current (A)	2
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	250
Max. products per 13A C Breaker	300
Max. products per 16A C Breaker	400
Max. products per 20A C Breaker	500
Max. products per 10A B Breaker	200
Max. products per 13A B Breaker	250
Max. products per 16A B Breaker	300
Max. products per 20A B Breaker	400
Connectable conductor cross section - Min (mm²)	0.75

## Obico 68

OBICO 68 IP65 530lm 3CCT DIM ADJ BLACK

0005364

Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5
--------------------------------------------------------------	-----

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B10	50000

### Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP65/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	None
Nominal Product Height (mm)	45.5
Nominal Product Diameter (mm)	81
Cutout Dimensions (W x L in mm or Diameter in mm)	68
Weight (kg)	0.21

### Packaging







Single packaging type	Carton
Product EAN number	5410288053646
Packaging single length / height (cm)	11.5
Packaging single width (cm)	8.0
Packaging single depth (cm)	14.4
DUN14 (inner)	25410288053640
Units per inner package	6
Packaging inner length / height (cm)	29.9
Packaging inner width (cm)	25.2
Packaging inner depth (cm)	12.8
DUN14 (outer)	15410288053643
Units per outer package	36
Packaging outer length / height (cm)	52.1
Packaging outer width (cm)	31.5
Packaging outer depth (cm)	41.1

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

## PHOTOMETRY

## Obico 68 OBICO 68 IP65 530lm 3CCT DIM ADJ BLACK 0005364

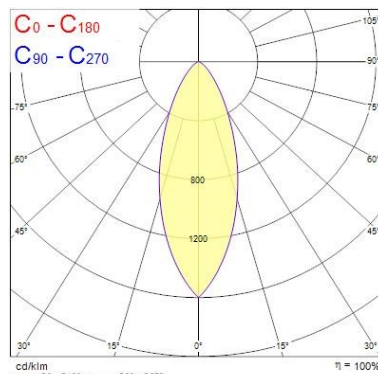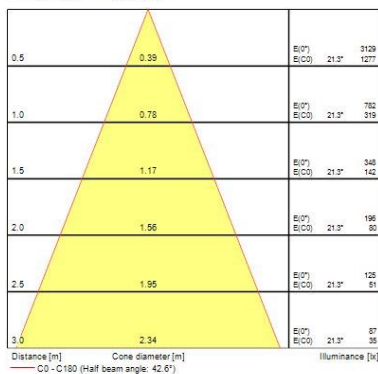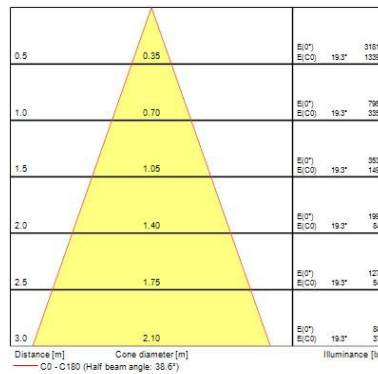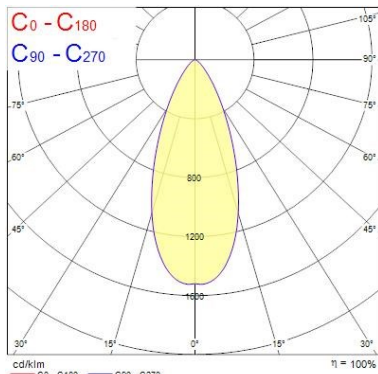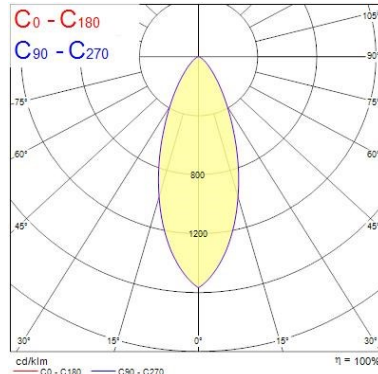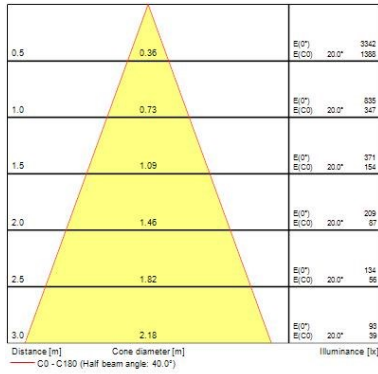

### TECHNICAL DRAWINGS

