



### Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, CRI80, Non-dimmable, 21900lm, 150W, 146lm/W, Asymmetrical Wide beam, 100.000hrs L70B50 lifespan, 404 x 313 x 73mm (LxWxD) dimensions, 3.7kg weight, RAL9017 Traffic Black color.


### Product Overview

<b>Product name</b>	Kalani IP66 21KLM 840 ASYM
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Other
<b>General application</b>	Logistics & Industry
<b>ETIM Class</b>	EC001744
<b>E-number FI</b>	4579620
<b>Fixture luminous flux (lm)</b>	21900
<b>Luminaire efficacy (lm/W)</b>	146
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	65x120
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	150
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Dimmable</b>	No
<b>LED Flickering Rate</b>	Low (6% - 20%)

## Kalani IP66 21KLM 840 ASYM 0056715

Housing colour	RAL 9017 - Traffic black
IP rating	IP66
IK rating	IK08
Product EAN number	5410288567150
Warranty	5 years
Dimming method	N/A

### Photometry

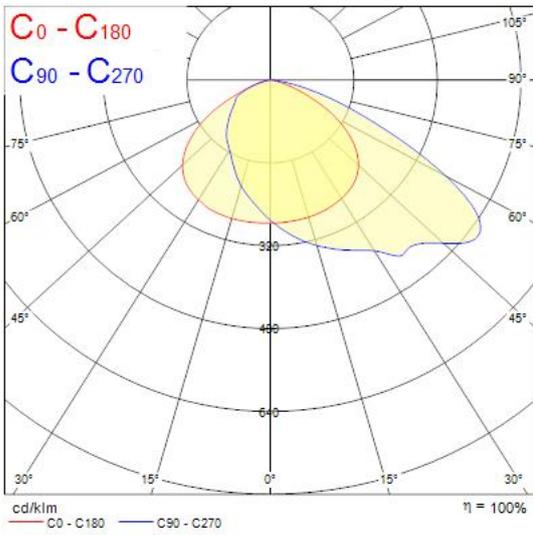

### Technical drawings

