

### Features

- Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°) brushed chrome bezel colour, 3 CCT options of 2700-3000-4000k, lumen up to 550lm, , 5.4W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 37mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Air-proof, to limit air leakage when used in residential applications within the building's thermal envelope. Directly coverable with insulation material according to EN60598-1


### Product Overview

<b>Product name</b>	OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling recessed mounting
<b>E-number FI</b>	4278507
<b>Fixture luminous flux (lm)</b>	530
<b>Luminaire efficacy (lm/W)</b>	98
<b>Light colour</b>	Cool White
<b>CRI (Ra)</b>	90
<b>Colour Variation Initial (SDCM)</b>	6
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	5.4
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>Housing colour</b>	Chrome

## OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME 0005365

IP rating	IP65/20
IK rating	IK07
Product EAN number	5410288053653
Warranty	5 years

### Photometry

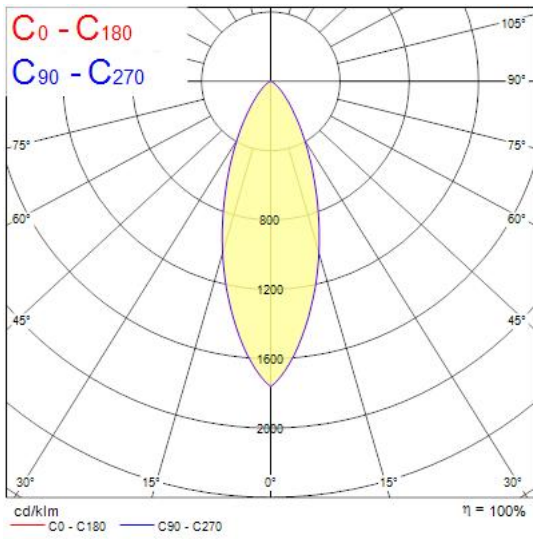

### Technical drawings

