


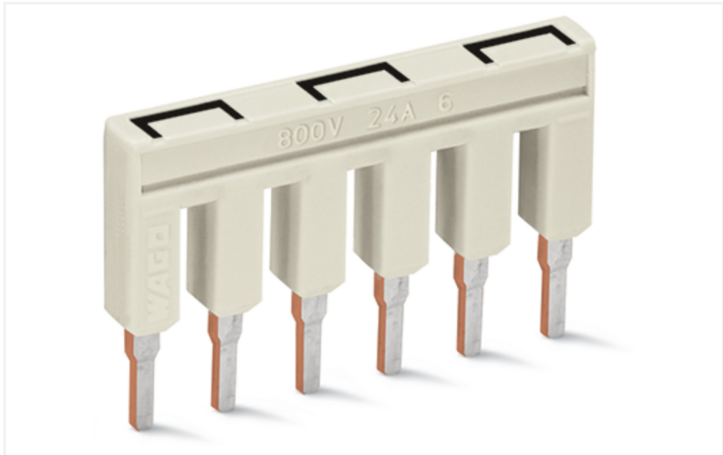

Color: ■ light gray

Electrical data

Ratings per IEC/EN	
Nominal voltage (III/3)	800 V
Rated impulse withstand voltage (III / 3)	8 kV
Rated current	25 A

Physical data

Width	29.5 mm / 1.161 inches
Height	4.1 mm / 0.161 inches
Depth	19 mm / 0.748 inches
Jumper assignment	1-2 3-4 5-6

Material data

Note (material data)	Information on material specifications can be found here
Color	light gray
Fire load	0.021 MJ
Weight	2.7 g

Commercial data

PU (SPU)	25 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143687454
Customs tariff number	85366990990



Product Classification	
UNSPSC	39121421
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 9.0	EC000489
ETIM 10.0	EC000489
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
2002-406/020-000


↓

Documentation				
Bid Text				
2002-406/020-000	19.02.2019	xml 2.54 KB	↓	
2002-406/020-000	27.04.2017	doc 23.50 KB	↓	

CAD/CAE-Data	
CAD data 2D/3D Models 2002-406/020-000 ↓	CAE data EPLAN Data Portal 2002-406/020-000 ↓ WSCAD Universe 2002-406/020-000 ↓ ZUKEN Portal 2002-406/020-000 ↓

Installation Notes

Commoning



This delta jumper has been specially developed to create a delta configuration and is used on motor terminal boards equipped with rail-mount terminal blocks TOPJOB® S.

