


Walraven BISMAT® Flash (M8/M10)

(A0505)

for steel, copper, cast iron and plastic (multilayer) pipe

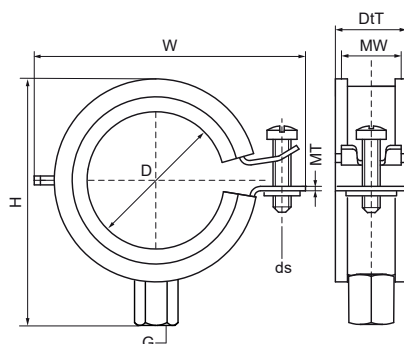

Features & benefits

- single screw clamp
- with Walraven BISMAT® Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- optimised noise insulation due to soft closing without tools
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



EPD

Product Number	NRF Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width	Material Thickness	Screw Size	Total Height	Total Width	Total Depth	Approvals	Maximum Allowed Load Faz
Reference Letter		D	D	D	G	MW	MT	ds	H	W	DtT		Fa,z
Unit description		mm		"		mm	mm		mm	mm	mm		N
3374018	3484282	15 - 18	DN 10	3/8	M8/M10	20	1.00	M6	46	47	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3374023	3484283	20 - 23	DN 15	1/2	M8/M10	20	1.00	M6	51	52	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3374028	3484284	25 - 28	DN 20	3/4	M8/M10	20	1.00	M6	56	57	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3374035	3484285	32 - 35	DN 25	1	M8/M10	20	1.00	M6	63	64	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3374043	3484286	40 - 43	DN 32	1 1/4	M8/M10	20	1.25	M6	71	72	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700
3374051	3484287	48 - 51	DN 40	1 1/2	M8/M10	20	1.25	M6	79	80	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700
3374056	3484288	53 - 56	-	-	M8/M10	20	1.25	M6	84	85	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700
3374063	3485171	57 - 63	DN 50	2	M8/M10	20	1.25	M6	90	91	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700