


Pixo Small
Pixo Small 1490lm 930 NB MB WB BLK
0005441



Product features

- Integrated LED spotlight, Textured Black - RAL9005, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lenses 24° and 54° beam angle included, color temperature: 3000K, total system power: 15W, total fixture output: 1496 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Powergear 3-circuit adapter suitable for 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø60x70x245, weight: 0.517kg.

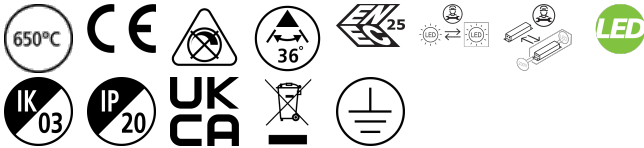

PRODUCT OVERVIEW

Product name	Pixo Small 1490lm 930 NB MB WB BLK
Technology	LED
Cap/Base	N/A
Environment	Indoor
General application	Museums & Galleries, Residential & Consumer, Retail
ETIM Class	EC001744
E-number FI	4278240
Warranty	5 years
Fixture luminous flux (lm)	1496
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	15
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
IP rating	IP20
IK rating	IK03
Product EAN number	5410288054414

DATA TABLE

General data	
Product name	Pixo Small 1490lm 930 NB MB WB BLK
Technology	LED
Cap/Base	N/A
Environment	Indoor

Pixo Small

Pixo Small 1490lm 930 NB MB WB BLK

0005441

General application	Museums & Galleries, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278240
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1496
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	36
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	15
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Inrush Current (A)	12
Inrush Duration (µs)	33
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	68
Max. products per 13A C Breaker	88
Max. products per 16A C Breaker	108
Max. products per 20A C Breaker	135
Max. products per 10A B Breaker	68
Max. products per 13A B Breaker	88
Max. products per 16A B Breaker	108
Max. products per 20A B Breaker	135


Lifetime data

Lifespan L70 B50	72000
Lifespan L90 B10	15000

Pixo Small

Pixo Small 1490lm 930 NB MB WB BLK

0005441

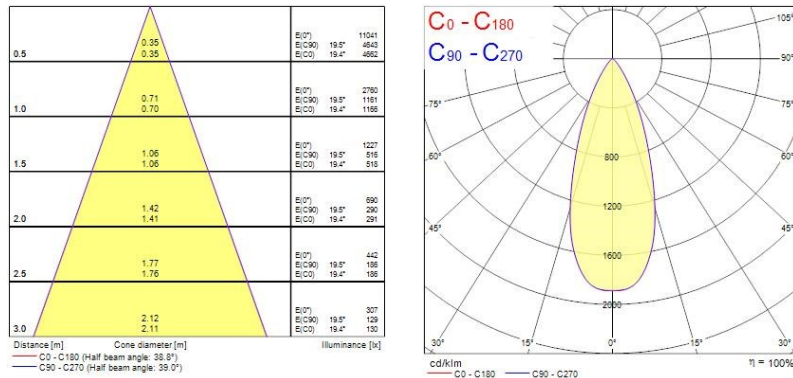

TECHNICAL DRAWINGS

