


Walraven BISMAT® Flash (M8)

(A0504)

for steel, copper, cast iron and plastic (multilayer) pipe

Features & benefits

- single screw clamp
- with Walraven BISMAT® Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- optimised noise insulation due to soft closing without tools
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety

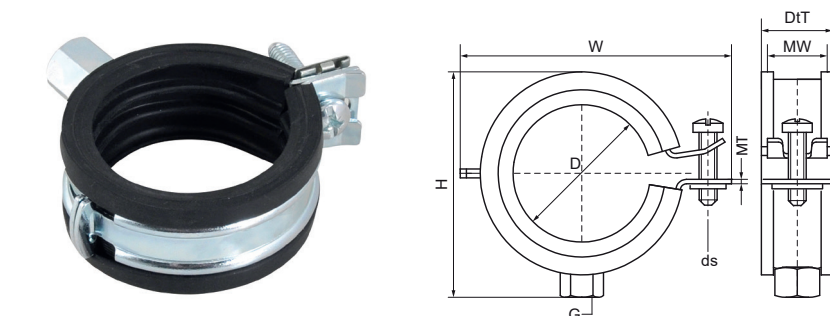

Product Number	VVS Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width	Material Thickness	Screw Size	Total Height	Total Width	Total Depth	Approvals	Maximum Allowed Load Faz
Reference Letter		D	D	D	G	MW	MT	ds	H	W	DtT		Fa,z
Unit description		mm		"		mm	mm		mm	mm	mm		N
3373018	18006118	15 - 18	DN 10	3/8	M8	20	1.00	M6	46	47	25	ETA, RAL-GZ 655/B, CE, RAL-GZ 656, ITB (KOT), ISO 3822-1, EPD	500
3373023	18006123	20 - 23	DN 15	1/2	M8	20	1.00	M6	43	52	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3373028	18006128	25 - 28	DN 20	3/4	M8	20	1.00	M6	48	57	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3373035	18006135	32 - 35	DN 25	1	M8	20	1.00	M6	55	64	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	500
3373043	18006143	40 - 43	DN 32	1 1/4	M8	20	1.25	M6	63	72	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700
3373051	18006151	48 - 51	DN 40	1 1/2	M8	20	1.25	M6	71	80	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700
3373056	18006156	53 - 56	-	-	M8	20	1.25	M6	76	85	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700
3373063	18006163	57 - 63	DN 50	2	M8	20	1.25	M6	82	91	25	ETA, RAL-GZ 655/B, RAL-GZ 656, CE, ITB (KOT), ISO 3822-1, EPD	700