




Similar to illustration

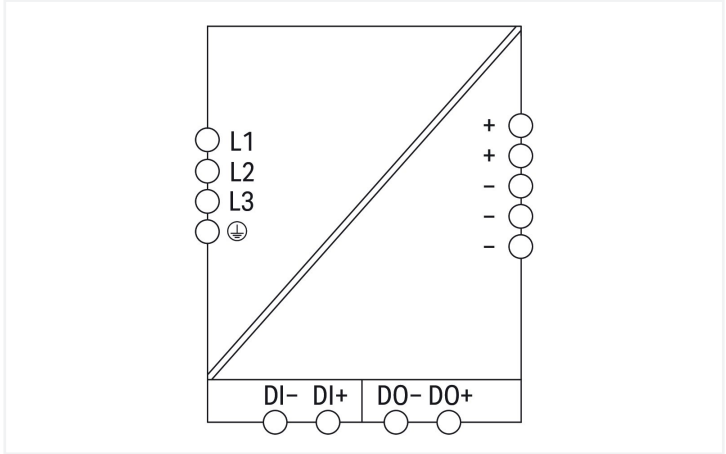

- Features:**
- Power supply with TopBoost, PowerBoost and configurable overload behavior
 - Configurable digital signal input and output, optical status indication, function keys
 - Communication interface for configuration and monitoring
 - Optional connection to IO-Link, EtherNet/IP™, Modbus TCP or Modbus RTU
 - Suitable for both parallel and series operation
 - Natural convection cooling when horizontally mounted
 - Pluggable connection technology
 - Electrically isolated output voltage (SELV/PELV) per EN 61010-2-201/UL 61010-2-201
 - Marker slot for WAGO marking cards (WMB) and WAGO marking strips

Technical data			
Input		Output	
Phases	3	Nominal output voltage $U_{o\ nom}$	24 VDC (SELV)
Nominal input voltage $U_{i\ nom}$	3 x 400 ... 500 VAC (connection without neutral conductor)	Output voltage range	24 ... 28 VDC (adjustable)
Input voltage range	3 x 340 ... 550 VAC	Default Setting	DC 24 V
Nominal mains frequency range	50 ... 60 Hz	Nominal output current $I_{o\ nom}$	5 A (24 VDC)
Input current I_i	$\leq 3 \times 0.4$ A (400 VAC; 24 VDC / 5 A)	Nominal output power	120 W
Inrush current	≤ 15 A (after 1 ms)	Deviation	$\leq 1\ %$
Power factor correction (PFC)	Active	Residual ripple	≤ 70 mV (peak-to-peak)
Mains failure hold-up time	≥ 20 ms (3 x 400 VAC)	Current limitation	1.1 x $I_{o\ nom}$ (typ.)
		Overload behavior	TopBoost/PowerBoost/Time-limited constant current mode (other overload behaviors can be set)



Output	
PowerBoost	DC 7.5 A (5 s)
TopBoost	Up to 600 %

Signaling and communication	
Signaling	Optical status indication (DC OK; load; warning and error states) Digital signal input and output (DI/DO)
Communications	USB (750-923 Communication Cable) EtherNet/IP™ (2789-9023 Communication Module) IO-Link (2789-9080 Communication Module) Modbus RTU (Communication Module 2789-9015) Modbus TCP (2789-9052 Communication Module)

Efficiency/power losses	
Efficiency (typ.)	92.5 % (230 VAC; 5 A; 25 °C)

Circuit protection	
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	3 x 16 A (for USA/Canada: 3 x 15 A)

Safety and protection	
Isolation voltage (pri.-sec., AC)	3510 V
Isolation voltage (pri.-PE, AC)	2200 V
Isolation voltage (sec.-PE)	0.5 kVDC
Isolation voltage (sec.-signal)	0.5 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	III (≤ 2000 m a.s.l.); II (> 2000 m a.s.l.)
Pollution degree	2
Transient suppression (primary)	Yes
Overvoltage protection; secondary	Internal protective circuit ≤ 35 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 1,400,000 h (per IEC 61709)

Connection data			
Connection 1		Connection 2	
Connection type 1	Input/signaling	Connection type	Output
Connection technology	CAGE CLAMP®	Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 721 Series	WAGO connector 2	WAGO 831 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG	Solid conductor	0.5 ... 10 mm² / 20 ... 8 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG	Fine-stranded conductor	0.5 ... 10 mm² / 20 ... 8 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm²
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor; with uninsulated ferrule	0.5 ... 6 mm²
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches	Strip length	13 ... 15 mm / 0.51 ... 0.59 inches



Physical data	
Width	40 mm / 1.57 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	130 mm / 5.118 inches
Note (dimensions)	Height without connector Height with connector: 166 mm

Mechanical data	
Mounting type	DIN-35 rail

Material data	
Fire load	0 MJ
Weight	650 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +70 °C (device starts at -40 °C (type-tested))
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	See instruction leaflet
Climatic category	3K3 (per EN 60721)
Operating altitude (max.)	5000 m

Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 61010-1 UL 61010-2-201 DNV SEMI F47

Commercial data	
ETIM 9.0	EC002540
ETIM 8.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966265941
Customs tariff number	85044083900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03080
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc.	UL 61010-2-201	UL-US-2219523-0

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
MFD for SEMI F47 WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV GL SE	DNV-CG-0339,Aug.2021	TAA00002ZF

Approvals for hazardous areas



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	UL 121201	A-E198726

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
2787-2344/000-030



Documentation

Manual

Product Manual Power supply; Pro 2; 3-phase; 24 VDC output voltage; 5 A output current	V 1.0.1 15.02.2022	pdf 8129.21 KB	
---	-----------------------	-------------------	--

Instruction Leaflet

Stromversorgung Pro 2	V 1.1.0 03.03.2022	pdf 4607.98 KB	
-----------------------	-----------------------	-------------------	--

CAD/CAE-Data

CAD data

2D/3D Models
2787-2344/000-030





1 Compatible Products

1.1 Product Expansions

1.1.1 Communication module



[Item No.: 2789-9023](#)
Communication module; EtherNet/IP;
MQTT; communication capability



[Item No.: 2789-9080](#)
Communication module; IO-Link; commu-
nication capability



[Item No.: 2789-9015](#)
Communication module; Modbus RTU;
RJ45; communication capability



[Item No.: 2789-9052](#)
Communication module; Modbus TCP;
communication capability

1.2 Optional Accessories

1.2.1 Marking

1.2.1.1 Marker carrier



[Item No.: 2789-1233](#)
Marker carrier; for WMB or marking strips;
Length: 33 mm