



中国国家强制性产品认证证书

证书编号：2024010307658958

认证委托人名称及地址

ABB Stotz-Kontakt GmbH
Eppelheimer Strasse 82 69123 Heidelberg Germany

生产者名称及地址

ABB Stotz-Kontakt GmbH
Eppelheimer Strasse 82 69123 Heidelberg Germany

生产企业名称及地址

ABB Stotz-Kontakt GmbH
Eppelheimer Strasse 82 69123 Heidelberg Germany

产品名称和系列、型号、规格

电动机保护用断路器

MS132, MO132, MS132-T, MS132-B, MO132-B, MS132-K, MS132-L; 具体参数和型号解释详见附页

产品标准和技术要求

GB/T 14048. 2-2020; GB/T 14048. 4-2020

上述产品符合《强制性产品认证实施规则 低压电器 低压元器件》
(CNCA-C03-02:2024) 的要求，特发此证。

发证日期：2024年07月17日 有效期至：2029年07月16日

证书信息和有效性可扫描下方二维码或登录发证机构网站查验，
也可在认监委网站（www.cnca.gov.cn）查询。



签发：

谢肇煦



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

中国质量认证中心有限公司





中国国家强制性产品认证证书

证书编号: 2024010307658958

证书附页: 第 1 页 共 3 页

MS132, MO132, MS132-T, MS132-B, MO132-B, MS132-K, MS132-L

Uimp: 6kV;

Ui: 690V;

Ue: AC230V, AC400V, AC440V, AC500V, AC690V;

In: 0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A, 2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A, 20-25A, 25-32A;

过电流脱扣器类型: 热磁式;

AC230V, AC400V: Ics=30kA(25-32A), Icu=50kA(25-32A); Ics=Icu=50kA(20-25A);

Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A, 2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A);

AC440V: Ics=Icu=30kA(2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A, 20-25A, 25-32A);

Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A);

AC500V: Ics=Icu=10kA(20-25A, 25-32A); Ics=Icu=20kA(2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A); Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A);

AC690V: Ics=Icu=3kA(2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A, 20-25A, 25-32A);

Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A);

选择性类别: A;

使用类别: AC-3, AC-3e;

适用频率: 50/60Hz;

脱扣级别: 10;

极数: 3P;

适用于隔离;

配用的辅助触头:

HKF1-xx, HKF1-xxK (CQC 证书编号: CQC2017010304032779)

Ith: 5A;

AC-15: Ue/Ie: 24V/3A, 120V/3A, 240V/1.5A;

本页为证书附页, 应与证书主页同时使用。



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

中国质量认证中心有限公司



中国国家强制性产品认证证书

证书编号：2024010307658958

证书附页：第 2 页 共 3 页

DC-13: Ue/Ie: 24V/1A, 125V/0.27A, 250V/0.11A;

1NO,1NC

HK1-xx, HK1-xxK, SK1-xx, SK1-xxK,CK1-xx (CQC 证书编号:

CQC2017010304032778)

Ith: 6A;

AC-15: Ue/Ie: 24V/6A, 110-120V/6A, 220-240V/4A, 400V/3A, 690V/1A;

DC-13: Ue/Ie: 24V/2A, 110-125V/0.55A, 250V/0.27A, 400V/0.15A, 600V/0.15A;

2NO, 2NC

本页为证书附页，应与证书主页同时使用。



中国质量认证中心

CHINA QUALITY CERTIFICATION CENTRE

中国质量认证中心有限公司



中国国家强制性产品认证证书

证书编号: 2024010307658958

证书附页: 第 3 页 共 3 页

型号解释:

MS 132 -16 K T HKF1-11
1 2 3 4 5 6

1: Product series 产品系列(MS/MO)

MS: with thermal tripping and magnetic tripping 带过载和短路

MO: only have magnetic tripping that thermal tripping function is deactivated
只有短路保护

2: Basic type 基本型号(132)

3: Current range 电 流 等 级

(0.16/0.25/0.4/0.63/1.0/1.6/2.5/4.0/6.3/10/12/16/20/25/32)

4: blank: standard version (screw terminal) 空白: 标准版(螺纹端子)

K: Push In terminal 插接型端子

5: blank: standard product 空白: 标准版

T: Transformer protection 变压器保护

B: Railway Application 铁路用

L: Green House Application Green House 项目用

6: blank: without accessory 空白: 不带附件

HKF1: mounted accessory for HKF1-xx, HKF1-xxK, HK1-xx, HK1-xxK,
SK1-xx, SK1-xxK, CK1-xx

HKF1: 带附件 HKF1-xx, HKF1-xxK, HK1-xx, HK1-xxK, SK1-xx,
SK1-xxK, CK1-xx

本页为证书附页, 应与证书主页同时使用。



中国质量认证中心

CHINA QUALITY CERTIFICATION CENTRE

中国质量认证中心有限公司



CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，
不得单独使用
This translated document
does not have legal validity and
cannot be used in isolation

CERTIFICATE NO.: 2024010307658958

NAME AND ADDRESS OF THE APPLICANT

ABB Stotz-Kontakt GmbH
Eppelheimer Strasse 82 69123 Heidelberg Germany

NAME AND ADDRESS OF THE MANUFACTURER

ABB Stotz-Kontakt GmbH
Eppelheimer Strasse 82 69123 Heidelberg Germany

NAME AND LOCATION OF THE FACTORY

ABB Stotz-Kontakt GmbH
Eppelheimer Strasse 82 69123 Heidelberg Germany

PRODUCT NAME,MODEL AND SPECIFICATION

Motor protection circuit breaker
MS132, MO132, MS132-T, MS132-B, MO132-B, MS132-K, MS132-L ; See the Appendix

STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS

GB/T 14048.2-2020;GB/T 14048.4-2020

This is to certify that the above mentioned product(s) complies with the requirements of implementation rules for compulsory certification(REFNO. CNCA-C03-02:2024).

Valid from: Jul.17,2024

Valid until: Jul.16,2029

The certificate information and validity could be checked by scanning the QR code below or logging in to the website of the issuing authority, or on the website of the CNCA (www.cnca.gov.cn).



SIGNATURE:

谢肇煦



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.





CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，
不得单独使用
This translated document
does not have legal validity and
cannot be used in isolation

CERTIFICATE NO. : 2024010307658958

Appendix : Page 1 of 2

MS132, MO132, MS132-T, MS132-B, MO132-B, MS132-K, MS132-L

Uimp: 6kV;

Ui: 690V;

Ue: AC230V, AC400V, AC440V, AC500V, AC690V;

In: 0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A,
2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A, 20-25A, 25-32A;

Over current release type: Thermal Magnetic type;

AC230V, AC400V: Ics=30kA(25-32A), Icu=50kA(25-32A); Ics=Icu=50kA(20-25A);

Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A,
1.6-2.5A, 2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A);

AC440V: Ics=Icu=30kA(2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A,
20-25A, 25-32A);

Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A,
1.6-2.5A);

AC500V: Ics=Icu=10kA(20-25A, 25-32A); Ics=Icu=20kA(2.5-4.0A, 4.0-6.3A,
6.3-10A, 8.0-12A, 10-16A, 16-20A); Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A,
0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A, 1.6-2.5A);

AC690V: Ics=Icu=3kA(2.5-4.0A, 4.0-6.3A, 6.3-10A, 8.0-12A, 10-16A, 16-20A,
20-25A, 25-32A);

Ics=Icu=100kA(0.1-0.16A, 0.16-0.25A, 0.25-0.4A, 0.4-0.63A, 0.63-1.0A, 1.0-1.6A,
1.6-2.5A);

Selectivity Category: A;

Utilization Category: AC-3,AC-3e;

50/60Hz;

Trip class com.cqc.cms.component.word.CertiAnnexDataModel: 10;

Poles: 3P;

Suitable for isolation;

Attached Auxiliary Contacts:

HKF1-xx, HKF1-xxK (CQC2017010304032779)

Ith: 5A;

AC-15: Ue/Ie: 24V/3A, 120V/3A, 240V/1.5A;

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.



CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

本翻译文件不具有法律效力，
不得单独使用
This translated document
does not have legal validity and
cannot be used in isolation

CERTIFICATE NO. : 2024010307658958

Appendix : Page 2 of 2

DC-13: Ue:/Ie: 24V/1A, 125V/0.27A, 250V/0.11A;

1NO,1NC


HK1-xx, HK1-xxK, SK1-xx, SK1-xxK,CK1-xx (CQC2017010304032778)

Ith: 6A;

AC-15: Ue:/Ie: 24V/6A, 110-120V/6A, 220-240V/4A, 400V/3A, 690V/1A;

DC-13: Ue:/Ie: 24V/2A, 110-125V/0.55A, 250V/0.27A, 400V/0.15A, 600V/0.15A;

2NO, 2NC

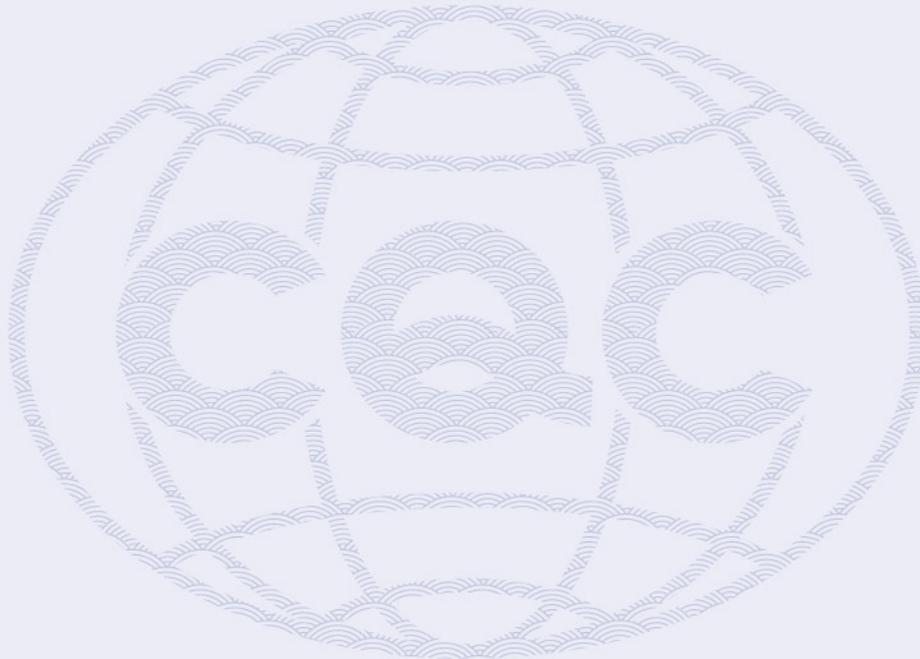

This page is attached to the certificate and should be used at the same time as the certificate page.



中国质量认证中心

CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.