

19107000	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-B 24 SDR-BO	

Description

- Ideal for many applications due to a wide range of housings and inserts



General Characteristics

Series	H-B 24
Version	Surface mount base
Protection cover	Yes
Locking	Bolts for double lever
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Cover	Aluminium alloy, powder-coated, grey
Sealing	NBR

Approvals

UL-Approval, E-File-Number	In preparation
----------------------------	----------------

Standard

Safety Standard	IEC 61984
-----------------	-----------


Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
19107000	EPIC H-B 24 SDR-BO M25	M25	-
19109000	EPIC H-B 24 SDRL-BO M25	M25	M25

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19107000EN Version: 03	Page 1 of 2
---	---------------------------------------	-------------

19107000	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-B 24 SDR-BO	

Technical Drawings

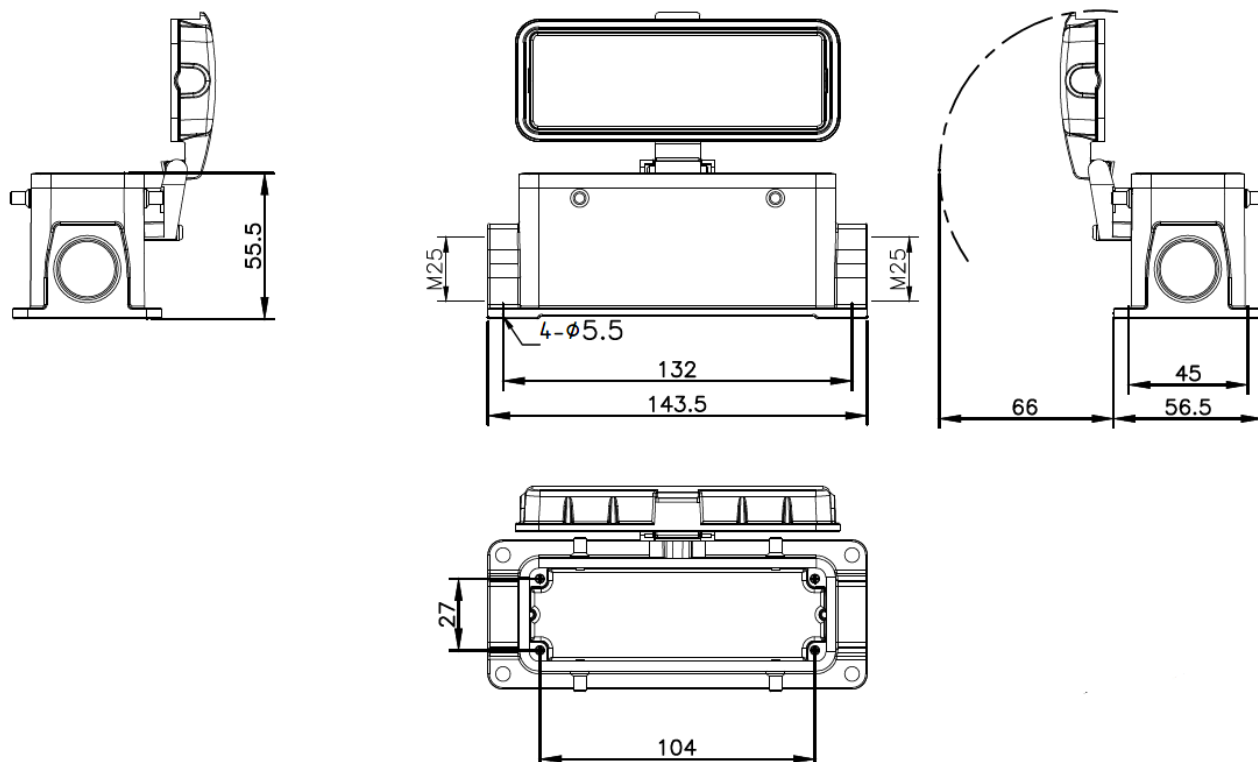


Automation



Mechanical resistance



Waterproof



Industrial machinery and plant engineering



Robust

Info

Universal, robust metal housings size H-B 24

Application range

Plant engineering, Light & sound technology, Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19107000EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------