



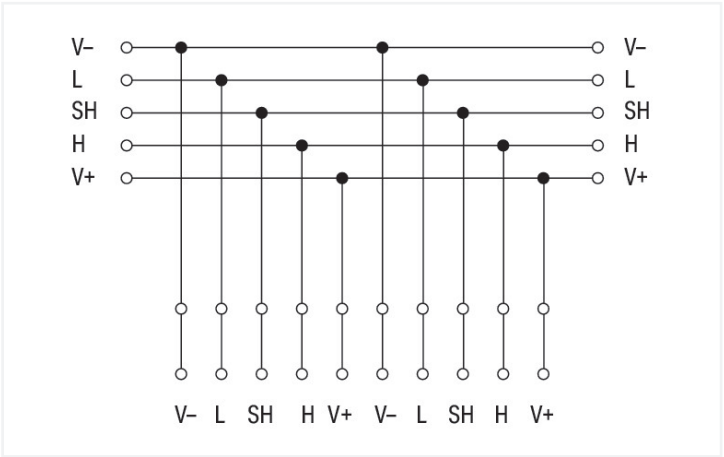

Similar to illustration

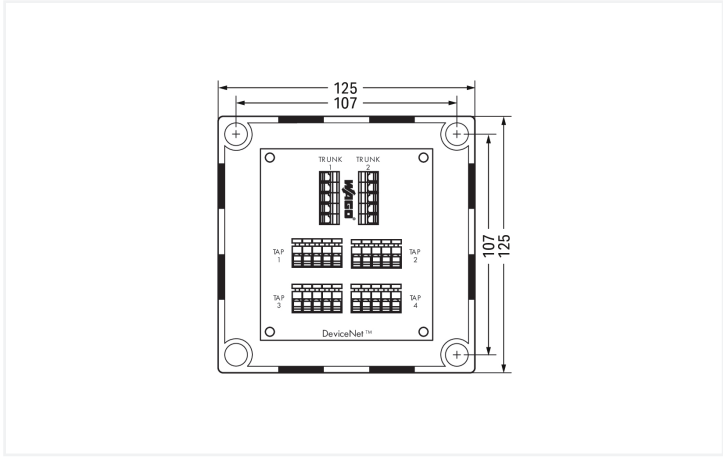

Dimensions in mm

For DeviceNet, a terminating resistor must be connected to each end of the trunk cable. A metal film resistor with the following values must be used: 121 Ohm $\pm$ 1 %, 1/4 W. Do not connect terminating resistors to the end of a drop cable, only connect to the ends of the trunk cable.

Connection Data	
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Connectable sheathed cable diameter	6 ... 14 mm
Connection point (other) designation	Trunk cables
Connection point (other) designation	Drop cables
Connection point (other) connection technology	CAGE CLAMP®
Connection point (other) connection technology	CAGE CLAMP®



Physical data	
Width	125 mm / 4.921 inches
Depth	125 mm / 4.921 inches

Material data	
Fire load	0.632 MJ
Weight	418.8 g
Housing	with cable entry holes
Housing protection type	IP65/NEMA 4

Commercial data	
PU (SPU)	1 pcs
Packaging type	Foil
Country of origin	US
GTIN	4050821750451
Customs tariff number	85369010000

Product Classification	
UNSPSC	39121402
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-44-32
ETIM 9.0	EC000635
ETIM 10.0	EC000635
ECCN	EAR99

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 810-900/000-001	

Documentation			
Bid Text			
810-900/000-001	19.02.2019	xml 3.65 KB	
810-900/000-001	05.03.2019	docx 16.57 KB	



CAD/CAE-Data	
CAE data	
WSCAD Universe 810-900/000-001	