

Concord

COLOSSAL 400mm 940 PRISM DIR+HAL WHITE 2071156



Features

• 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct/indirect (halo) light distribution, 1715lm luminuous flux, 16W system power, 107lm/W luminaire efficacy. Constant current driver. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 350mA drive current. UGR≤19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview

Product name	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture luminous flux (lm)	1715
Luminaire efficacy (lm/W)	107
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07


Concord

COLOSSAL 400mm 940 PRISM DIR+HAL WHITE


2071156

Product EAN number	5025768711567
Warranty	5 years
Colour Code	940

Photometry

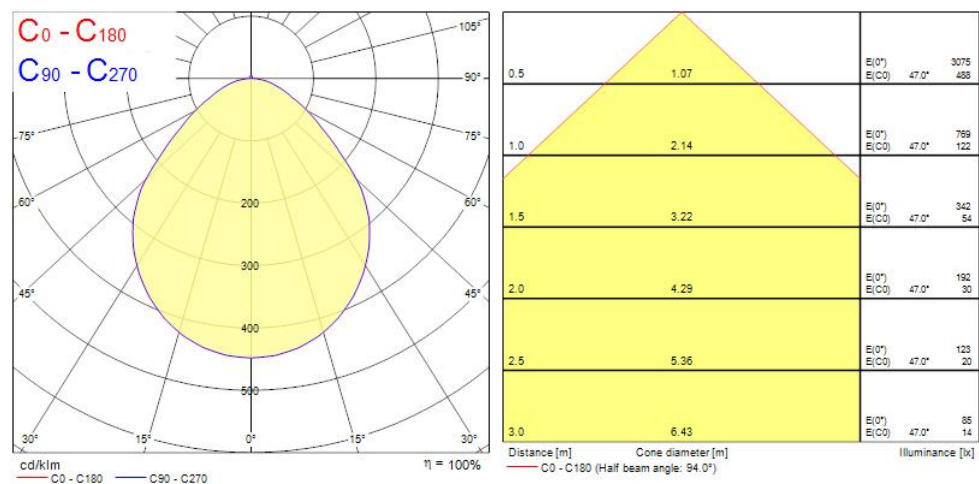

Technical drawings

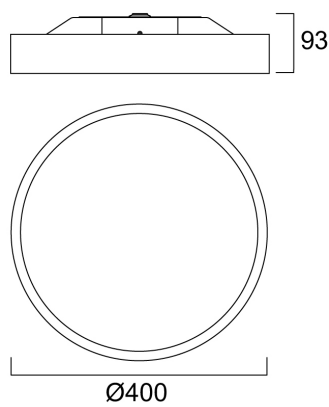

Data table

COLOSSAL 400mm 940 PRISM DIR+HAL WHITE 2071156

GENERAL DATA

Product name	COLOSSAL 400mm 940 PRISM DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Operating temperature range (°C)	10°C...+25°C
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1715
Luminaire efficacy (lm/W)	107
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	16
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.93
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	350
Inrush Current (A)	8
Inrush Duration (µs)	80
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C

COLOSSAL 400mm 940 PRISM DIR+HAL WHITE 2071156

Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. products per 10A C Breaker	65
Max. products per 20A B Breaker	125
Connectable conductor cross section - Min (mm ²)	1.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Diameter (mm)	400
Weight (kg)	6.5

PACKAGING

Single packaging type	Carton
Product EAN number	5025768711567
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (outer)	05025768711567
Packaging outer length / height (cm)	14.0

SAFETY DATA

Optimal operating condition (°C)	10-25
----------------------------------	-------

Concord

COLOSSAL 400mm 940 PRISM DIR+HAL WHITE
2071156

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No