

Optix Surface 1200 Direct Medium Output SylSmart

OPTIX SURFACE 1200 2L LUMI HCL TW ALU SSC

2023831

Product features

- OPTIX SURFACE 1200 2L LUMI HCL TW ALU SSC is a surface mounted luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. SylSmart Standalone controlled tunable white light engine. 2700-6200K Tunable White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 2700K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.524; Fidelity Index R :97; Gamut Index R :101. For 4000K - Colour rendering index Ra >95; Melanopic Ratio MEER: 0.819; Fidelity Index R :94; Gamut Index R :101. For 6200K - Colour rendering index Ra >98; Melanopic Ratio MEER: 1.071; Fidelity Index R :95; Gamut Index R :99. For 4000K luminous flux: 3500lm. Power consumption: 37W. Luminaire efficacy: 95lm/W. UGR<16 Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 68,000hrs L80B20 lifespan.




PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1200 2L LUMI HCL TW ALU SSC
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	3500
Fixture luminous flux (lm)	3500
Luminous flux (lm)	3500
Luminaire efficacy (lm/W)	95
Light colour	Tuneable White HCL
CRI (Ra)	95
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Total power consumption (W)	37
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238316

Optix Surface 1200 Direct Medium Output SylSmart
OPTIX SURFACE 1200 2L LUMI HCL TW ALU SSC
2023831

PHOTOMETRY

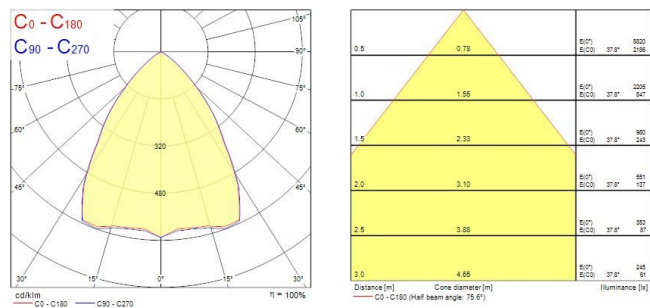

TECHNICAL DRAWINGS

