
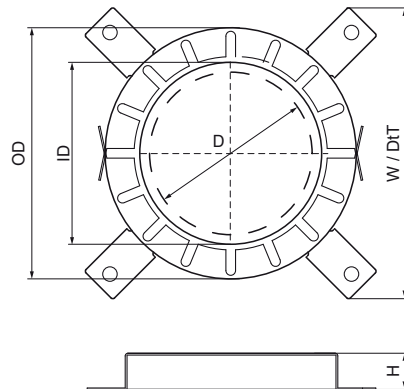


Walraven Pacifyre® AWM II+ Fire Collar

(U0430)

Innovative fire collar for complex installations of plastic and multi-layer pipes



Features & benefits

- Zero distance is possible between fire collars
- Built-up fire collar for plastic (combustible) pipes and pipe systems. For apertures in walls (solid walls or flexible walls) and floors with fire protection
- Installation of elbows, pipe couplings or branch pipes into the wall or, directly in, or under the ceiling is possible
- With a fire resistance up to EI 120 U/U
- Installation of telecommunications pipeline or protective piping with up to 2 cables is possible
- The use of PE noise insulation hose up to a thickness of 4 mm of composite natural rubber insulation to a thickness of 43 mm is allowed
- Tested and approved according to EN 1366-3

Product Number	VVS Number	Outside Pipe Diameter	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference Letter		D	ID	OD	H	W	DtT	
Unit description		mm	mm	mm	mm	mm	mm	
2134225225	18067322	225	239	328	100	500	510	10
2134250250	18067325	250	264	353	100	500	510	10
2134280280	18067328	280	289	378	100	500	510	12
2134355355	18067335	355	370	459	50	453	453	12
2134400400	18067340	400	415	504	50	503	503	12
2134075077	18067275	75	83	110	26	106	106	4
2134090092	18067290	90	100	138	26	132	132	4
2134110112	18067311	110	120	161	26	155	155	4
2134160160	18067316	160	169	225	40	220	220	6
2134180180	18067318	180	184	264	40	264	264	8
2134200200	18067320	200	204	284	40	284	284	8