

Concord

OPTIX RECESSED 600x600 3L HO 3000K ALU

2023618



Features

- OPTIX RECESSED 600x600 3L HO 3000K ALU is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 3 lines configuration. White RAL9016 fixture body. Constant current driver. 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 4450lm. Power consumption 36W. Luminaire efficacy 124lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

Product Overview

| | |
|--|--|
| Product name | OPTIX RECESSED 600x600 3L HO 3000K ALU |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| Fixture rating | Enclosed |
| Fixture luminous flux (lm) | 4450 |
| Luminaire efficacy (lm/W) | 124 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 16 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 36 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |

Concord
by SYLVANIA

Concord

OPTIX RECESSED 600x600 3L HO 3000K ALU

2023618

IP rating

IP20

IK rating

IK07


Product EAN number

5025768236183

Warranty

5 years

Photometry

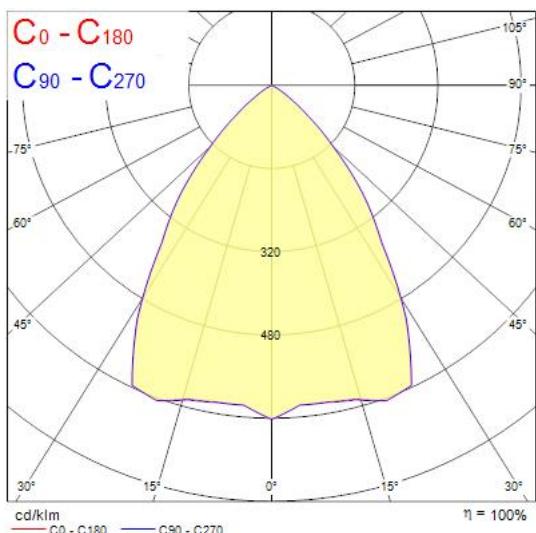

Technical drawings

