

Product End of Life Instructions

**Overhead dispenser, Schneider StarCharge Fast 720, 1xCCS2,
10m cable range**

Schneider StarCharge Fast 720



Schneider
Electric



Potential disassembly risks

⚠ WARNING


HAZARD OF ARC FLASH OR FIRE

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

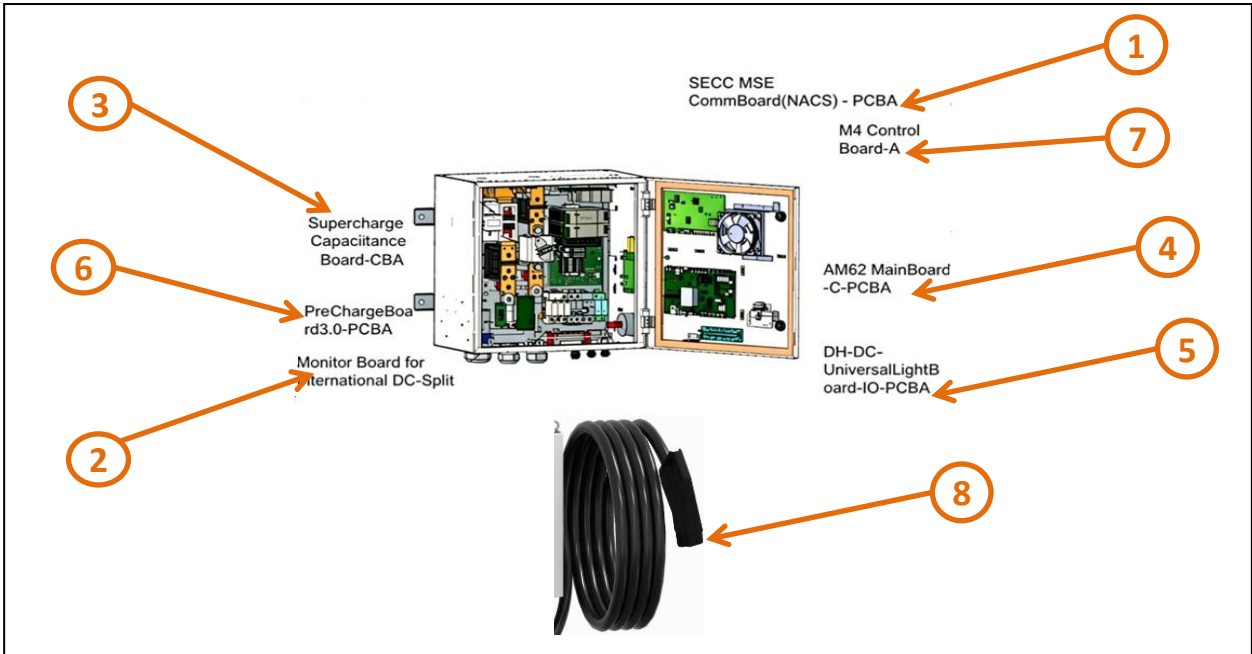

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm²	91	PCBA1
To be depolluted	2	Electronic Board (Communication) > 10cm²	27.1	PCBA2
To be depolluted	3	Electronic Board (Communication) > 10cm²	300	PCBA3
To be depolluted	4	Electronic Board (Communication) > 10cm²	340.5	PCBA4
To be depolluted	5	Electronic Board (Communication) > 10cm²	14	PCBA5
To be depolluted	6	Electronic Board (Communication) > 10cm²	21	PCBA6
To be depolluted	7	Electronic Board (Communication) > 10cm²	176	PCBA7
To be depolluted	8	External cable	32996.34	External cable



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The Schneider StarCharge Fast 720 can be wall-mounted or roof-mounted. It is compatible with 720kW power cabinets. Its function is to enable the full charging of an electric vehicle within 1 hour.
Product reference	EVD1T720P0B
Total representative product mass	71924 g
Representative product dimensions	341.7mm x 590mm x 584mm
Accessories	Charging station gun cable
Date of information release	01/05/2026

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.
In case of special transportation: transportation method	No
Recyclability potential	51% The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVEOLI2604018_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

01/05/2026