




Color: ■ red

Similar to illustration

Technical data		
Marking method	Thermal transfer	
Marking	L1, , L2, , L3, , N, , ⊕, ;	
Marking (number)	10	
Marking direction	Horizontal marking	
Marking color	black	
Marking type	Symbol	
Marking layout	Consecutive symbols each strip	
Delivery form	Marker card	
Delivery form configuration	10 strips with 10 markers per card	
Flammability class per UL94	V0	
Physical data		
Height	152 mm / 5.984 inches	
Width	56.8 mm / 2.236 inches	
Depth	3.2 mm / 0.126 inches	
Marker/strip width	5 mm	
Marker width	5 mm	
Mechanical data		
Smear resistance	EN 60998-1:2004	

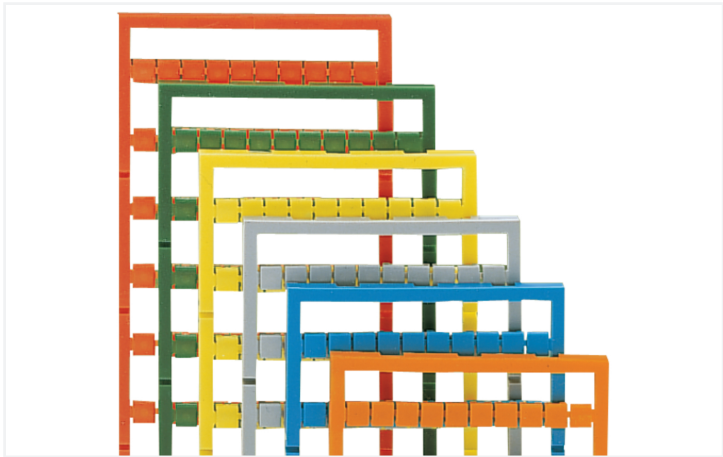

Material data	
Color	red
UV resistance	EN 60068-2-5:2010 Procedure B
Halogen-free	Yes
Weight	6.7 g
Fire load	0.201 MJ

Commercial data	
Product Group	9 (Std Chassis Mt Blocks)
PU (SPU)	50 (5) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332011600
Customs tariff number	49119900000

Product Classification	
UNSPSC	55121718
eCl@ss 10.0	27-14-11-37
eCl@ss 9.0	27-14-11-37
ETIM 9.0	EC000761
ETIM 10.0	EC000761
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 264-902/000-005	

Installation Notes

Marking



Marking via Mini-WSB Quick Marking System.