

BEACON XL MUSE 3K SSC01 L3 WHT

Item No: 2059327


Concord



2059327 BEACON XL MUSE 3K SSC01 L3 WHT Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 10° spot to a 70° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 70° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 41W, total fixture output: 2544lm, luminaire efficacy: 62lm/W, LOR: 100%, super high colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1050mA, electronic driver, SylSmart SSC, power factor: 0.95, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment on...


Technical Assets

Dimensions (mm)

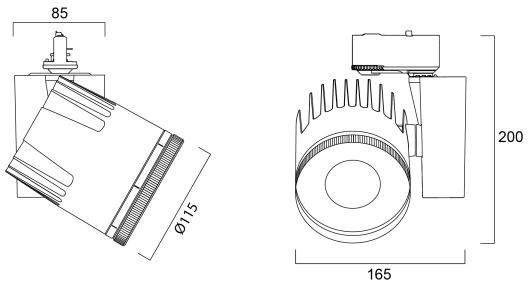

Photometrics

| Distance [m] | Cone diameter [m] | E(C θ) | E(C 0) | Illuminance [lx] |
|--------------|-------------------|----------------|-----------|------------------|
| 0.5 | 0.00 | 49123 | 49123 | |
| 1.0 | 0.00 | 12281 | 12281 | |
| 1.5 | 0.00 | 5458 | 5458 | |
| 2.0 | 0.00 | 3070 | 3070 | |
| 2.5 | 0.00 | 1965 | 1965 | |
| 3.0 | 0.00 | 1365 | 1365 | |



BEACON XL MUSE 3K SSC01 L3 WHT

Item No: 2059327

Concord

General data

| | |
|---|--------------------------------|
| Product name | BEACON XL MUSE 3K SSC01 L3 WHT |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| Environment | Internal |
| General application | Museums & Galleries, Retail |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001744 |
| Warranty | 5 years |

Optical data

| | |
|-----------------------------------|------------|
| Useful luminous flux (Φuse) | 2544 |
| Fixture luminous flux (Im) | 2544 |
| Luminaire efficacy (lm/W) | 62 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 97 |
| Colour Consistency (SDCM) | 3 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 10 |
| Photobiological Risk Group | RG0 |

Electrical data

| | |
|--|--------------------|
| Total power consumption (W) | 41 |
| Primary Supply/Product voltage - min (V) | 220 |
| Primary Supply/Product voltage - max (V) | 240 |
| Lamp power factor | 0.95 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Dimming method | SylSmart SSC |
| Minimum dimming level (%) | 5 |
| Drive current (mA) | 1050 |
| Inrush Current (A) | 5 |
| Inrush Duration (μs) | 50 |
| Energy Efficiency Class (A->G) of contained light source | F |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 52 |
| Max. products per 16A C Breaker | 85 |
| Max. products per 20A C Breaker | 54 |
| Max. products per 10A B Breaker | 32 |
| Max. products per 16A B Breaker | 50 |
| Max. products per 20A B Breaker | 63 |
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 100000 |
| Lifespan L90 B10 | 86000 |

Lifetime data

| | |
|-------------------------------|----------------|
| Housing colour | White |
| IP rating | IP20 |
| Reflector finish | Not Applicable |
| Nominal Product Width (mm) | 165 |
| Nominal Product Height (mm) | 200 |
| Nominal Product Diameter (mm) | 115 |
| Weight (kg) | 1.7 |

BEACON XL MUSE 3K SSC01 L3 WHT

Item No: 2059327

Concord

Packaging

| | |
|---------------------------------------|----------------|
| Product EAN number | 5025768593279 |
| Packaging single length / height (cm) | 25.0 |
| Packaging single width (cm) | 19.5 |
| Packaging single depth (cm) | 20.0 |
| DUN14 (inner) | 05025768593279 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 25.0 |
| Packaging outer width (cm) | 19.5 |
| Packaging outer depth (cm) | 20.0 |