


Optix Recessed 600x600 High Output
OPTIX RECESSED 600x600 3L HO 4000K ALU DALI EM
2023624

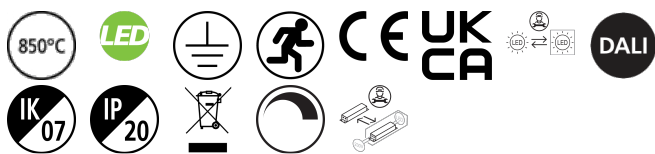


PRODUCT OVERVIEW

Product name	OPTIX RECESSED 600x600 3L HO 4000K ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	136
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768236244

PHOTOMETRY

Optix Recessed 600x600 High Output
OPTIX RECESSED 600x600 3L HO 4000K ALU DALI EM
2023624

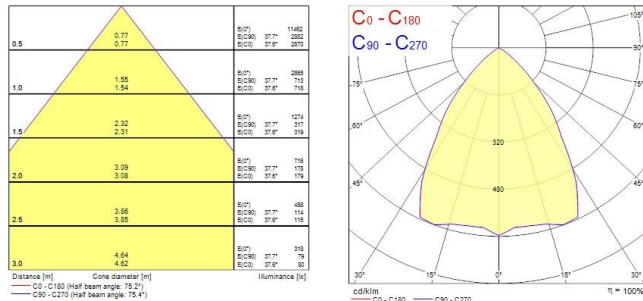

TECHNICAL DRAWINGS

