

### Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 34W; 124lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour LiFePO4 maintained emergency batteries (580lm emergency lm output) with DALI interface.


### Product Overview

<b>Product name</b>	RESISTO 1500 IP66 4200LM 840 EM PRO
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting, Suspended, Wall surface mounted
<b>General application</b>	Logistics & Industry
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4200
<b>Luminaire efficacy (lm/W)</b>	124
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	5
<b>Beam Angle (°)</b>	110
<b>Glare control</b>	< 22
<b>Photobiological Risk Group</b>	RG1
<b>Luminous flux (emergency) (lm)</b>	580

## RESISTO 1500 IP66 4200LM 840 EM PRO 0010344

Total power consumption (W)	34
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103440
Warranty	5 years
Dimming method	N/A

### Photometry

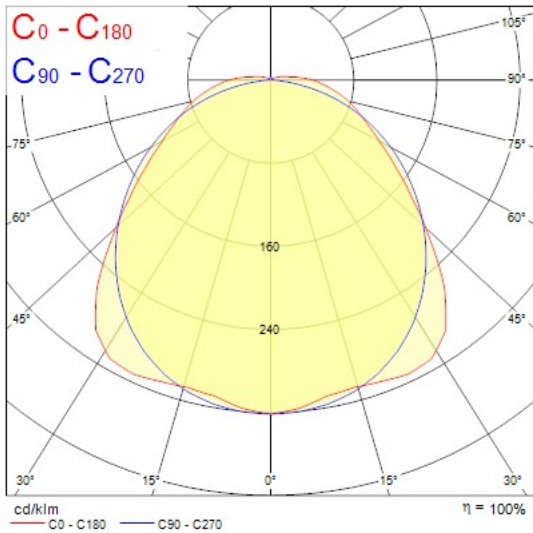

### Technical drawings

