

Installatie instructie

EG2-230V-24VDC

Voor Ei 146e & Ei 3016



Fito Products BV
De Langkamp 12A
3961 MS Wijk bij Duurstede
The Netherlands
www.fito.eu info@fito.nl


Specificaties:

Stroomvoorziening:	AC 220-240V 50/60Hz
DC-trigger spanning:	DC 3-12V
Uitgangsvermogen:	DC 24V – 5W– 166mA

Product omschrijving:

- De basis wordt aangedreven door 220-240V.
- De gebruiker moet de basisinstallatie voltooien om ervoor te zorgen dat de EG2-230V-24VDC correct functioneert.
- De sokkel kan worden aangesloten op de vrijloop deurdranger die functioneert op 24V DC.
- EG1-230V-24VDC relaisvoet is compatibel met rookmelder Ei146e en Ei3016.

1. Installatie instructie (basis installatie):

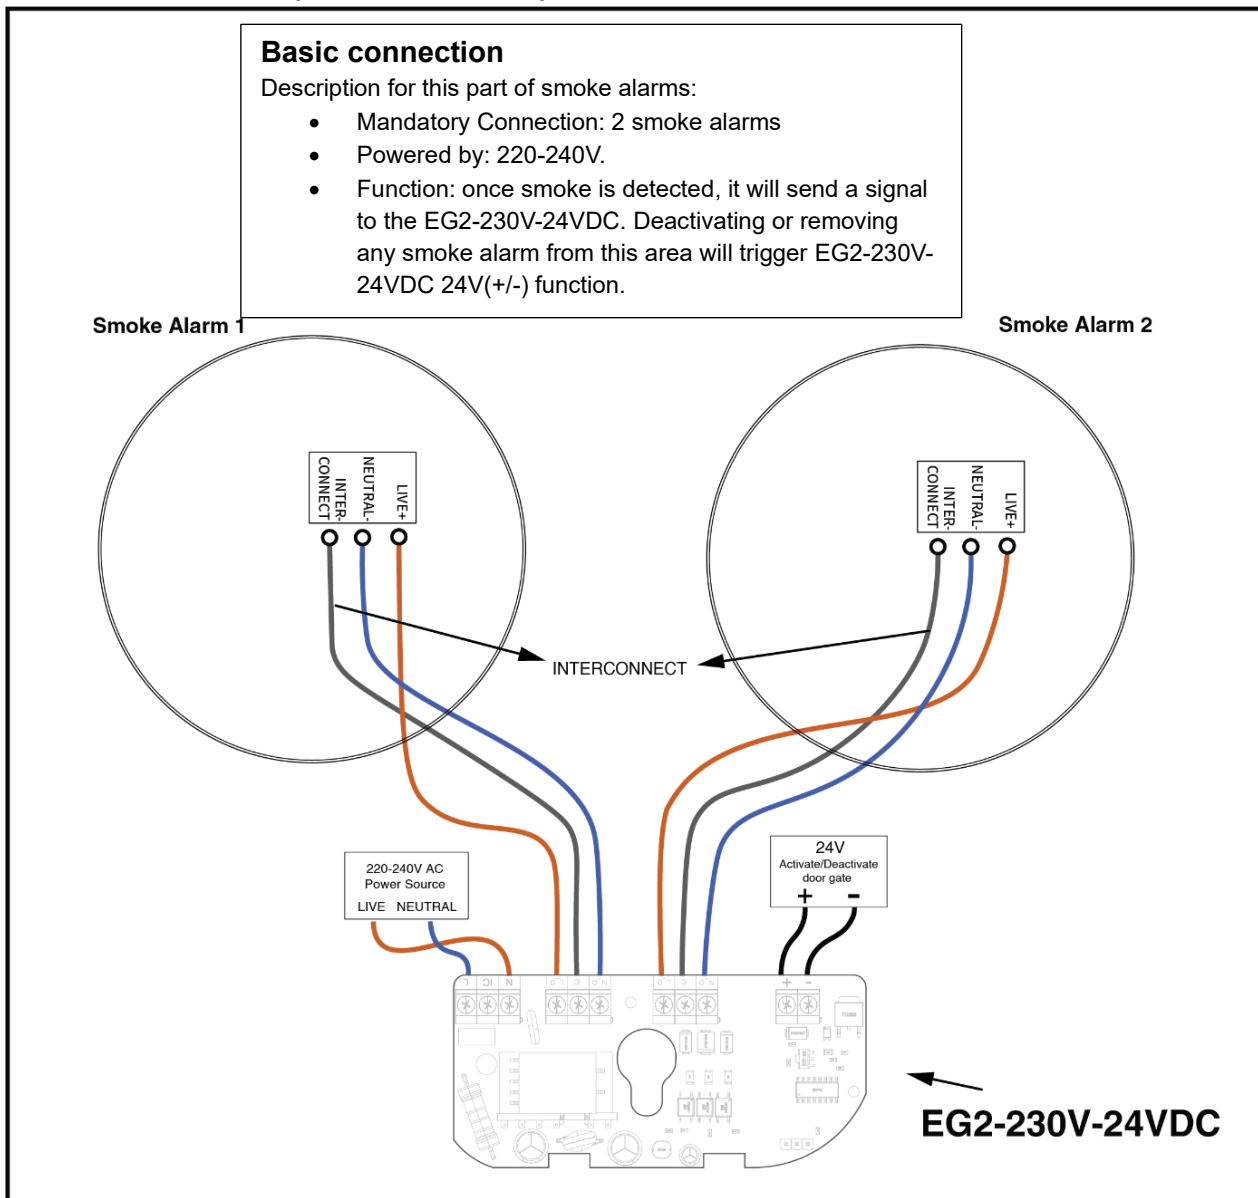

2. Installatie instructie (Meer dan 2 rookmelders)

- Meer dan 2 rookmelders met elkaar verbinden

Extended connection

Description for this part of smoke alarm(s):

- Maximum connection: 38 smoke alarms
- Powered by: 220-240V.
- Function: once smoke is detected, it will send a signal to the EG2-230V-24VDC.
- Important Point: Removing the smoke alarm from this area does not trigger EG2-230V-24VDC 24V(+/-) function.

Basic connection

Description for this part of smoke alarms:

- Mandatory Connection: 2 smoke alarms
- Powered by: 220-240V.
- Function: once smoke is detected, it will send a signal to the EG2-230V-24VDC. Deactivating or removing any smoke alarm from this area will trigger EG2-230V-24VDC 24V(+/-) function.

